


Ultra Miniature Transformers

S Series Thru Hole

The PICO "S Series" units can be manufactured and tested to MIL-PRF-27/359. Contact factory for price and delivery information and appropriate part numbers (MIL-PRF-27/359-01 thru MIL-PRF-27/359-147).

Specifications:

- **MIL-PRF-27:** All units manufactured to MIL-PRF-27, Grade 5, Class S.
- **FREQUENCY RESPONSE:** ± 3 db, 50 Hz - 30 KHz at 1.0 Milliwatt. (± 0.5 db, 300 Hz - 5 KHz).
- **MAXIMUM DISTORTION:** 5% With Rated Power Level at 1 KHz, 300 Hz and 50 Hz.
- **DIELECTRIC STRENGTH:** All Units Tested at 200 V RMS.
- **INSULATION RESISTANCE:** Greater Than 10,000 Megohms at 300 V DC.
- **WEIGHT:** 17 Grams.
- **OPERATING TEMPERATURE:** -55° C to $+130^{\circ}$ C.
- **TERMINALS:** Solid .020 Diameter Conductor. Solderability per MIL-STD-202 Method 208.
- **THERMAL SHOCK:** 25 Cycles, Method 107, MIL-STD-202, Test Condition -55° C to $+130^{\circ}$ C.

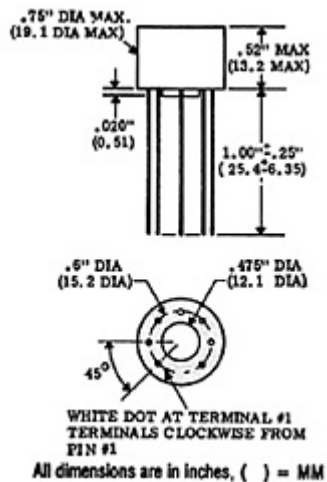

[Larger size drawing of S Series](#)

Ultra Miniature Transformers: S Series

Pico Part Number	Prim. Imped. Ohms	Sec. Imped. Ohms Split Windings		Power Watts			Prim. Unbal. DC Curr. ma	Prim. DC Resist. Ohms	Sec. DC Resist. Ohms		Turns Ratio Prim/Sec.		Prices 1-9 *** (US \$)
		SER	PAR	1 KHz and higher	300 Hz and higher	50 Hz and higher			Ser Conn	Par Conn	Sec Ser Conn	Sec Par Conn	
S-21003	20ct	8ct	2	2.0	1.5	.03	22	1.6	.88	.22	1.58:1	3.16:1	85.05
S-21005	20ct	20ct	5	2.0	1.5	.03	22	1.6	2.2	.55	1:1	2:1	85.05
S-21010	32ct	32ct	8	2.0	1.5	.03	17.5	2.56	3.52	.88	1:1	2:1	85.05
S-21015	40ct	40ct	10	2.0	1.5	.03	16	3.2	4.4	1.1	1:1	2:1	85.05
S-21018	48ct	16ct	4	2.0	1.5	.03	14.5	3.84	1.76	.44	1.73:1	3.46:1	85.05
S-21020	50ct	50ct	12.5	2.0	1.5	.03	14	4	5.5	1.38	1:1	2:1	85.05
S-21025	80ct	32ct	8	2.0	1.5	.03	11	6.4	3.52	.88	1.58:1	3.16:1	85.05
S-21028	100ct	40ct	10	2.0	1.5	.03	10	8	4.4	1.1	1.58:1	3.16:1	85.05
S-21030	100ct	100ct	25	2.0	1.5	.03	10	8	11	2.75	1:1	2:1	85.05
S-21035	120ct	12.8ct	3.2	2.0	1.5	.03	9	9.6	1.41	.35	3.06:1	6.12:1	85.05

Ultra Miniature Transformers: S Series

Pico Part Number	Prim. Imped. Ohms	Sec. Imped. Ohms Split Windings		Power Watts			Prim. Unbal. DC Curr. ma	Prim. DC Resist. Ohms	Sec. DC Resist. Ohms		Turns Ratio Prim/Sec.		Prices 1-9 *** (US \$)
		SER	PAR	1 KHz and higher	300 Hz and higher	50 Hz and higher			Ser Conn	Par Conn	Sec Ser Conn	Sec Par Conn	

S-21040	120ct	60ct	15	2.0	1.5	.03	9	9.6	6.6	1.65	1.41:1	2.83:1	85.05
S-21045	120ct	120ct	30	2.0	1.5	.03	9	9.6	13.2	3.3	1:1	2:1	85.05
S-21050	150ct	12ct	3	2.0	1.5	.03	8	12	1.32	.33	3.54:1	7.08:1	85.05
S-21055	150ct	50ct	12.5	2.0	1.5	.03	8	12	5.5	1.38	1.73:1	3.46:1	85.05
S-21060	150ct	100ct	25	2.0	1.5	.03	8	12	11	2.75	1.22:1	2.44:1	85.05
S-21065	150ct	150ct	37.5	2.0	1.5	.03	8	12	16.5	4.13	1:1	2:1	85.05
S-21070	150ct	600ct	150	2.0	1.5	.03	8	12	66	16.5	1:2	1:1	85.05
S-21075	200ct	200ct	50	2.0	1.5	.03	7	16	22	5.5	1:1	2:1	85.05
S-21080	300ct	12ct	3	2.0	1.5	.03	5.5	24	1.32	.33	5:1	10:1	85.05
S-21085	300ct	50ct	12.5	2.0	1.5	.03	5.5	24	5.5	1.38	2.45:1	4.9:1	85.05
S-21090	300ct	150ct	37.5	2.0	1.5	.03	5.5	24	16.5	4.13	1.41:1	2.83:1	85.05
S-21095	300ct	300ct	75	2.0	1.5	.03	5.5	24	33	8.25	1:1	2:1	85.05
S-21100	300ct	600ct	150	2.0	1.5	.03	5.5	24	66	16.5	1:1.41	1.41:1	85.05
S-21105	320ct	12.8ct	3.2	2.0	1.5	.03	5.5	25.6	1.41	.35	5:1	10:1	85.05
S-21110	400ct	40ct	10	2.0	1.5	.03	5	32	4.4	1.1	3.16:1	6.32:1	85.05
S-21115	400ct	120ct	30	2.0	1.5	.03	5	32	13.2	3.3	1.83:1	3.65:1	85.05
S-21120	400ct	200ct	50	2.0	1.5	.03	5	32	22	5.5	1.41:1	2.83:1	85.05
S-21125	400ct	400ct	100	2.0	1.5	.03	5	32	44	11	1:1	2:1	85.05
S-21130	400ct	1000ct	250	2.0	1.5	.03	5	32	110	27.5	1:1.58	1.26:1	85.05
S-21135	400ct	2000ct	500	2.0	1.5	.03	5	32	220	55	1:2.24	1:1.12	85.05
S-21140	400ct	4000ct	1000	2.0	1.5	.03	5	32	440	110	1:3.16	1:1.58	85.05
S-21142	500ct	12.8ct	3.2	2.0	1.5	.03	4.5	40	1.41	.35	6.25:1	12.5:1	85.05
S-21144	500ct	16ct	4	2.0	1.5	.03	4.5	40	1.76	.44	5.6:1	11.2:1	85.05
S-21145	500ct	50ct	12.5	2.0	1.5	.03	4.5	40	5.5	1.38	3.16:1	6.32:1	85.05
S-21147	500ct	150ct	37.5	2.0	1.5	.03	4.5	40	16.5	4.13	1.83:1	3.65:1	85.05
S-21150	500ct	500ct	125	2.0	1.5	.03	4.5	40	55	13.75	1:1	2:1	85.05
S-21155	*500ct	500ct	-	2.0	1.5	.03	4.5	40	55	-	1:1	-	88.43
S-21160	500ct	600ct	150	2.0	1.5	.03	4.5	40	66	16.5	1:1.1	1.83:1	85.05
S-21165	600ct	12.8ct	3.2	2.0	1.5	.03	4	48	1.41	.35	6.85:1	13.7:1	85.05
S-21167	600ct	30ct	7.5	2.0	1.5	.03	4	48	3.3	.83	4.47:1	8.94:1	85.05
S-21170	600ct	48ct	12	2.0	1.5	.03	4	48	5.28	1.37	3.54:1	7.07:1	85.05
S-21175	600ct	200ct	50	2.0	1.5	.03	4	48	22	5.5	1.73:1	3.46:1	85.05
S-21180**	600ct	600ct	150	2.0	1.5	.03	4	48	66	16.5	1:1	2:1	85.05
S-21185**	*600ct	600ct	-	2.0	1.5	.03	4	48	66	-	1:1	-	88.43
S-21186**	*600ct	900ct	-	2.0	1.5	.03	4	48	99	-	1:1.22	-	88.43
S-21187**	600ct	1200ct	300	2.0	1.5	.03	4	48	132	33	1:1.41	1.41:1	85.05
S-21190	640ct	12.8ct	3.2	2.0	1.5	.03	4	51	1.41	.35	7.07:1	14.14:1	85.05
S-21195	700ct	100ct	25	2.0	1.5	.03	3.5	56	11	2.75	2.65:1	5.29:1	85.05
S-21200	800ct	12.8ct	3.2	2.0	1.5	.03	3.5	64	1.41	.35	7.91:1	15.8:1	85.05
S-21205	800ct	48ct	12	2.0	1.5	.03	3.5	64	5.28	1.32	4.08:1	8.16:1	85.05
S-21210	800ct	800ct	200	2.0	1.5	.03	3.5	64	88	22	1:1	2:1	85.05
S-21215	900ct	600ct	150	2.0	1.5	.03	3	72	66	16.5	1.23:1	2.45:1	85.05
S-21217**	*900ct	900ct	-	2.0	1.5	.03	3	72	99	-	1:1	-	88.43
S-21220	1000ct	12ct	3	2.0	1.5	.03	3	80	1.32	.33	9.13:1	18.26:1	85.05
S-21225	1000ct	50ct	12.5	2.0	1.5	.03	3	80	5.5	1.38	4.47:1	8.94:1	85.05

S-21230	1000ct	1000ct	250	2.0	1.5	.03	3	80	110	27.5	1:1	2:1	85.05
S-21235	1060ct	12.8ct	3.2	2.0	1.5	.03	3	85	1.41	.35	9.1:1	18.2:1	85.05
S-21240	1200ct	12.8ct	3.2	2.0	1.5	.03	3	96	1.41	.35	9.68:1	19.4:1	85.05
S-21245	1200ct	500ct	125	2.0	1.5	.03	3	96	55	13.75	1.55:1	3.1:1	85.05
S-21250	1200ct	1200ct	300	2.0	1.5	.03	3	96	132	33	1:1	2:1	85.05

Ultra Miniature Transformers: S Series													
Pico Part Number	Prim. Imped. Ohms	Sec. Imped. Ohms Split Windings		Power Watts			Prim. Unbal. DC Curr. ma	Prim. DC Resist. Ohms	Sec. DC Resist. Ohms		Turns Ratio Prim/Sec.		Prices 1-9 *** (US \$)
		SER	PAR	1 KHz and higher	300 Hz and higher	50 Hz and higher			Ser Conn	Par Conn	Sec Ser Conn	Sec Par Conn	
S-21255	*1200ct	1200ct	-	2.0	1.5	.03	3	96	132	-	1:1	-	88.43
S-21260	1500ct	12ct	3	2.0	1.5	.03	2.5	120	1.32	.33	11.18:1	22.36:1	85.05
S-21265	1500ct	500ct	125	2.0	1.5	.03	2.5	120	55	13.75	1.73:1	3.46:1	85.05
S-21270	*1500ct	600ct	-	2.0	1.5	.03	2.5	120	66	-	1.58:1	-	88.43
S-21275	*1500ct	1500ct	-	2.0	1.5	.03	2.5	120	165	-	1:1	-	88.43
S-21280	1600ct	12.8ct	3.2	2.0	1.5	.03	2.5	128	1.41	.35	11.18:1	22.36:1	85.05
S-21283	2000ct	8ct	2	2.0	1.5	.03	2.2	160	.88	.22	15.8:1	31.6:1	85.05
S-21285	2000ct	2000ct	500	2.0	1.5	.03	2.2	160	220	55	1:1	2:1	85.05
S-21290	*2000ct	2000ct	-	2.0	1.5	.03	2.2	160	220	-	1:1	-	88.43
S-21295	2000ct	8000ct	2000	2.0	1.5	.03	2.2	160	880	220	1:2	1:1	88.43
S-21297	2500ct	2500ct	625	2.0	1.5	.03	2	200	275	69	1:1	2:1	88.43
S-21300	3000ct	3000ct	750	2.0	1.5	.03	1.8	240	330	83	1:1	2:1	88.43
S-21305	*3000ct	3000ct	-	2.0	1.5	.03	1.8	240	330	-	1:1	-	88.43
S-21310	3600ct	3600ct	900	2.0	1.5	.03	1.7	288	396	99	1:1	2:1	88.43
S-21312	4000ct	16ct	4	2.0	1.5	.03	1.6	320	1.76	.44	15.8:1	31.6:1	88.43
S-21314**	4000ct	600ct	150	2.0	1.5	.03	1.6	320	66	16.5	2.58:1	5.16:1	88.43
S-21315	4000ct	1000ct	250	2.0	1.5	.03	1.6	320	110	27.5	2:1	4:1	88.43
S-21320	*4000ct	8000ct	-	2.0	1.5	.03	1.6	320	880	-	1:1.41	-	88.43
S-21325	5000ct	500ct	125	2.0	1.5	.03	1.4	400	55	13.8	3.16:1	6.32:1	85.05
S-21330	5000ct	5000ct	1250	2.0	1.5	.03	1.4	400	550	138	1:1	2:1	85.05
S-21335	7500ct	50ct	12.5	1.3	1.3	.03	1.2	600	5.5	1.38	12.25:1	24.5:1	94.19
S-21340	7500ct	100ct	25	1.3	1.3	.03	1.2	600	11	2.75	8.66:1	17.32:1	94.19
S-21345	7500ct	600ct	150	1.3	1.3	.03	1.2	600	66	16.5	3.54:1	7.07:1	87.05

S-21350	7500ct	2500ct	625	1.3	1.3	.03	1.2	600	275	69	1.73:1	3.46:1	94.19
S-21355	*7500ct	7500ct	-	1.3	1.3	.03	1.2	600	825	-	1:1	-	101.80
S-21360	8000ct	12.8ct	3.2	1.2	1.2	.03	1.1	640	1.4	.35	25:1	50:1	94.19
S-21365	8000ct	1000ct	250	1.2	1.2	.03	1.1	640	110	27.5	2.83:1	5.66:1	94.19
S-21370	*8000ct	1200ct	-	1.2	1.2	.03	1.1	640	132	-	2.58:1	-	101.80
S-21375	*9000ct	9000ct	-	1.1	1.1	.03	1.1	720	990	-	1:1	-	101.80
S-21380	10,000ct	12.8ct	3.2	1.0	1.0	.03	1	800	1.4	.35	28:1	56:1	94.19
S-21385	10,000ct	16ct	4	1.0	1.0	.03	1	800	1.76	.44	25:1	50:1	94.19
S-21390	10,000ct	100ct	25	1.0	1.0	.03	1	800	11	2.75	10:1	20:1	94.19
S-21395	10,000ct	200ct	50	1.0	1.0	.03	1	800	22	5.5	7.07:1	14.14:1	94.19
S-21400	10,000ct	500ct	125	1.0	1.0	.03	1	800	55	13.75	4.47:1	8.94:1	94.19
S-21405	10,000ct	600ct	150	1.0	1.0	.03	1	800	66	16.5	4.08:1	8.16:1	94.19
S-21410	10,000ct	1000ct	250	1.0	1.0	.03	1	800	110	27.5	3.16:1	6.32:1	94.19
S-21415	10,000ct	1200ct	300	1.0	1.0	.03	1	800	132	33	2.89:1	5.77:1	94.19
S-21420	10,000ct	1500ct	375	1.0	1.0	.03	1	800	165	41.3	2.58:1	5.16:1	94.19
S-21425	10,000ct	2000ct	500	1.0	1.0	.03	1	800	220	55	2.24:1	4.47:1	94.19
S-21430	10,000ct	5000ct	1250	1.0	1.0	.03	1	800	550	138	1.41:1	1.83:1	94.19
S-21435	10,000ct	7500ct	1875	1.0	1.0	.03	1	800	825	206	1.16:1	2.31:1	94.19
S-21440	10,000ct	10,000ct	2500	1.0	1.0	.03	1	800	1100	275	1:1	2:1	94.19
S-21445	*10,000ct	10,000ct	-	1.0	1.0	.03	1	800	1100	-	1:1	-	101.80
S-21450	15,000ct	400ct	100	.65	.65	.03	.8	1200	44	11	6.12:1	12.25:1	94.19
S-21452	15,000ct	500ct	125	.65	.65	.03	.8	1200	55	13.8	5.48:1	10.95:1	94.19
S-21455	15,000ct	600ct	150	.65	.65	.03	.8	1200	66	16.5	5:1	10:1	94.19
S-21460	15,000ct	10,000ct	2500	.65	.65	.03	.8	1200	1100	275	1.22:1	2.45:1	94.19
S-21465	*15,000ct	15,000ct	-	.65	.65	.03	.8	1200	1650	-	1:1	-	101.80

Ultra Miniature Transformers: S Series

Pico Part Number	Prim. Imped. Ohms	Sec. Imped. Ohms Split Windings		Power Watts			Prim. Unbal. DC Curr. ma	Prim. DC Resist. Ohms	Sec. DC Resist. Ohms		Turns Ratio Prim/Sec.		Prices 1-9 *** (US \$)
		SER	PAR	1 KHz and higher	300 Hz and higher	50 Hz and higher			Ser Conn	Par Conn	Sec Ser Conn	Sec Par Conn	

S-21470	15,000ct	15,000ct	3750	.65	.65	.03	.8	1200	1650	413	1:1	2:1	94.19
S-21475	16,000ct	1000ct	250	.62	.62	.03	.8	1280	110	27.5	4:1	8:1	94.19
S-21480	20,000ct	500ct	125	.5	.5	.03	.7	1600	55	13.8	6.32:1	12.65:1	101.80
S-21485	20,000ct	600ct	150	.5	.5	.03	.7	1600	66	16.5	5.77:1	11.55:1	101.80
S-21490	20,000ct	800ct	200	.5	.5	.03	.7	1600	88	22	5:1	10:1	101.80
S-21495	20,000ct	1000ct	250	.5	.5	.03	.7	1600	110	27.5	4.47:1	8.94:1	101.80
S-21500	20,000ct	5000ct	1250	.5	.5	.03	.7	1600	550	138	2:1	4:1	101.80
S-21505	20,000ct	10,000ct	2500	.5	.5	.03	.7	1600	1100	275	1.41:1	2.83:1	101.80
S-21510	*20,000ct	20,000ct	-	.5	.5	.03	.7	1600	2200	-	1:1	-	104.85
S-21515	25,000ct	500ct	125	.4	.4	.03	.6	2000	55	13.8	7.07:1	14.14:1	101.80
S-21520	25,000ct	1000ct	250	.4	.4	.03	.6	2000	110	27.5	5:1	10:1	101.80
S-21525	30,000ct	50ct	12.5	.33	.33	.03	.6	2400	5.5	1.38	24.5:1	49:1	104.85
S-21530	30,000ct	1200ct	300	.33	.33	.03	.6	2400	132	33	5:1	10:1	104.85
S-21532	30,000ct	500ct	125	.33	.33	.03	.6	2400	55	13.8	7.7:1	15.5:1	104.85
S-21534	30,000ct	200ct	50	.33	.33	.03	.6	2400	22	5.5	12.2:1	24.5:1	104.85
S-21535	30,000ct	5000ct	1250	.33	.33	.03	.6	2400	550	137.5	2.45:1	4.9:1	104.85
S-21540	30,000ct	10,000ct	2500	.33	.33	.03	.6	2400	1100	275	1.73:1	3.46:1	104.85
S-21545	*30,000ct	30,000ct	-	.33	.33	.03	.6	2400	3300	-	1:1	-	112.73
S-21550	40,000ct	400ct	100	.25	.25	.03	.5	3200	44	11	10:1	20:1	112.73
S-21555	40,000ct	2000ct	500	.25	.25	.03	.5	3200	220	55	4.47:1	8.94:1	112.73
S-21560	40,000ct	4000ct	1000	.25	.25	.03	.5	3200	440	110	3.16:1	6.32:1	112.73
S-21565	40,000ct	20,000ct	5000	.25	.25	.03	.5	3200	2200	550	1.41:1	2.83:1	112.73
S-21570	*40,000ct	40,000ct	-	.25	.25	.03	.5	3200	4400	-	1:1	-	125.56
S-21575	50,000ct	200ct	50	.2	.2	.03	.4	4000	22	5.5	15.8:1	31.6:1	125.56
S-21577	50,000ct	500ct	125	.2	.2	.03	.4	4000	55	13.8	10:1	20:1	125.56
S-21578	50,000ct	600ct	150	.2	.2	.03	.4	4000	66	16.5	9.13:1	18.26:1	125.56
S-21579	50,000ct	50,000ct	12,500	.2	.2	.03	.4	4000	5500	1380	1:1	2:1	125.56
S-21580	60,000ct	15,000ct	3750	.16	.16	.03	.4	4800	1650	413	2:1	4:1	126.68
S-21585	62,500ct	50ct	12.5	.16	.16	.03	.4	5000	5.5	1.38	35.4:1	70.7:1	126.68
S-21587	80,000ct	15,000ct	3750	.12	.12	.03	.3	6400	1650	413	2.3:1	4.6:1	126.68
S-21590	90,000ct	10,000ct	2500	.11	.11	.03	.3	7200	1100	275	3:1	6:1	142.31
S-21595	95,000ct	15,000ct	3750	.1	.1	.03	.3	7600	1650	413	2.5:1	5:1	142.31
S-21600	100,000ct	60ct	15	.1	.1	.03	.3	8000	6.6	1.65	40.8:1	81.6:1	142.31
S-21605	100,000ct	100ct	25	.1	.1	.03	.3	8000	11	2.75	31.6:1	63.2:1	142.31
S-21610	100,000ct	500ct	125	.1	.1	.03	.3	8000	55	13.8	14.1:1	28.3:1	142.31
S-21613	100,000ct	1000ct	250	.1	.1	.03	.3	8000	110	27.5	10:1	20:1	142.31
S-21614	100,000ct	2000ct	500	.1	.1	.03	.3	8000	220	55	7.07:1	14.14:1	142.31
S-21615	100,000ct	10,000ct	2500	.1	.1	.03	.3	8000	1100	275	3.16:1	6.32:1	142.31
S-21620	135,000ct	82ct	20.5	.07	.07	.03	.2	10,800	9	2.25	40.6:1	81.2:1	148.69

*Includes electrostatic shield

**Miniaturized telephone coupling application

[For Surface Mount Versions of this series click here](#)

***Discount Prices:

- 1-9 Net;
- 10-24 less 10%;
- 25-49 less 16%;
- 50-99 less 23%;
- 100-499 less 30%


Ordering Instructions:

- No minimum.
- Net 30 days F.O.B. Pelham, NY
- **Delivery - stock to one week for sample orders.**


FEATURES

- Extreme resistance to thermal shock
- Ultra miniature size
- PICO is approved QPL Source (Mil-PRF-27)
- Magnetic Shields available
- Electrostatic shielding can be added
- Variation of standard designs available
- Primary and secondary windings can be used either as input or output.
- Special production techniques ensure uniform size and leads which are free of encapsulant. No meniscus in lead area.
- Every unit can be made with a 300 thermal cycle guarantee using PICO's special SR construction. Contact factory for details.

SCHEMATICS FOR TRANSFORMERS WITH SPLIT SECONDARIES



SCHEMATIC FOR TRANSFORMERS WITH ELECTROSTATIC SHIELD



For immediate engineering assistance or to place an order:

Call Toll Free: 800-431-1064

PICO Electronics, Inc.

143 Sparks Ave. Pelham, NY 10803-1810

Tel: 914-738-1400 or Fax: 914-738-8225

[Go back to Thru Hole Transformers and Inductors menu](#)