


LCH/LCV Heatsink, Thermal Interface


Mechanical Configurations

LCH HEATSINK

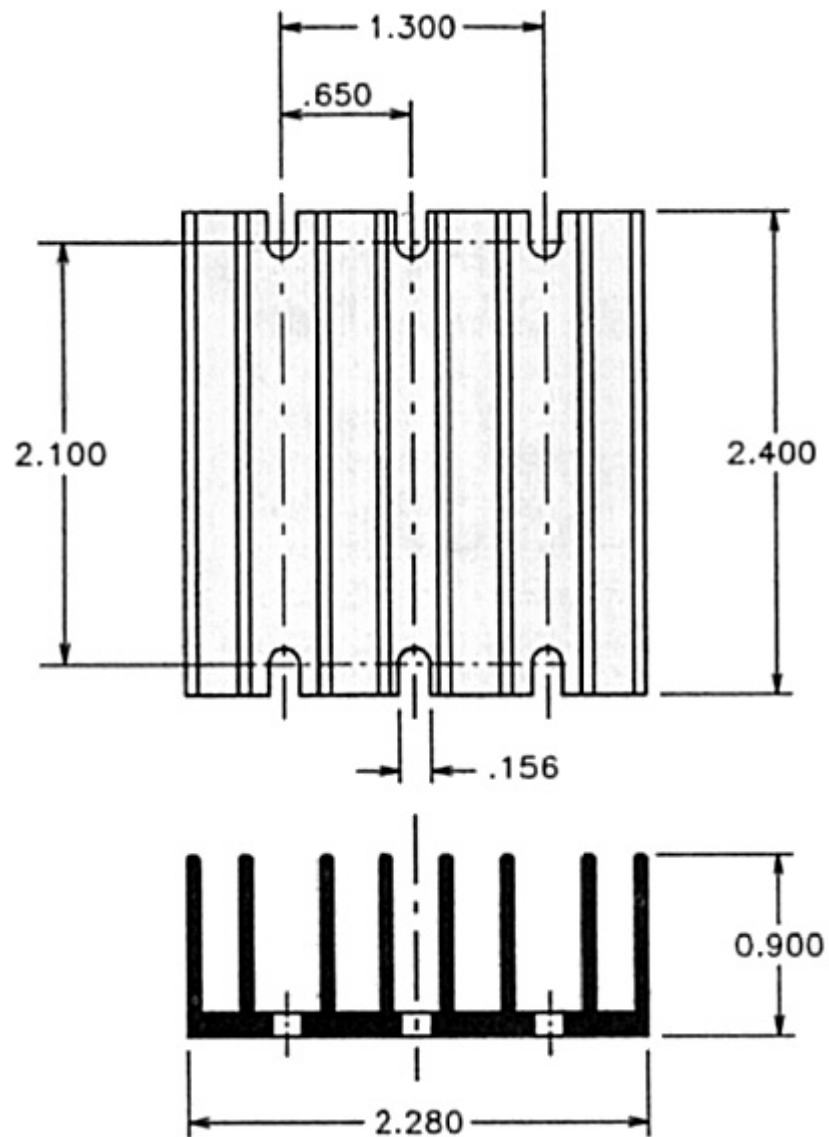


All Dimensions are in Inches
Typical Weight: 70 Grams

LCV HEATSINK

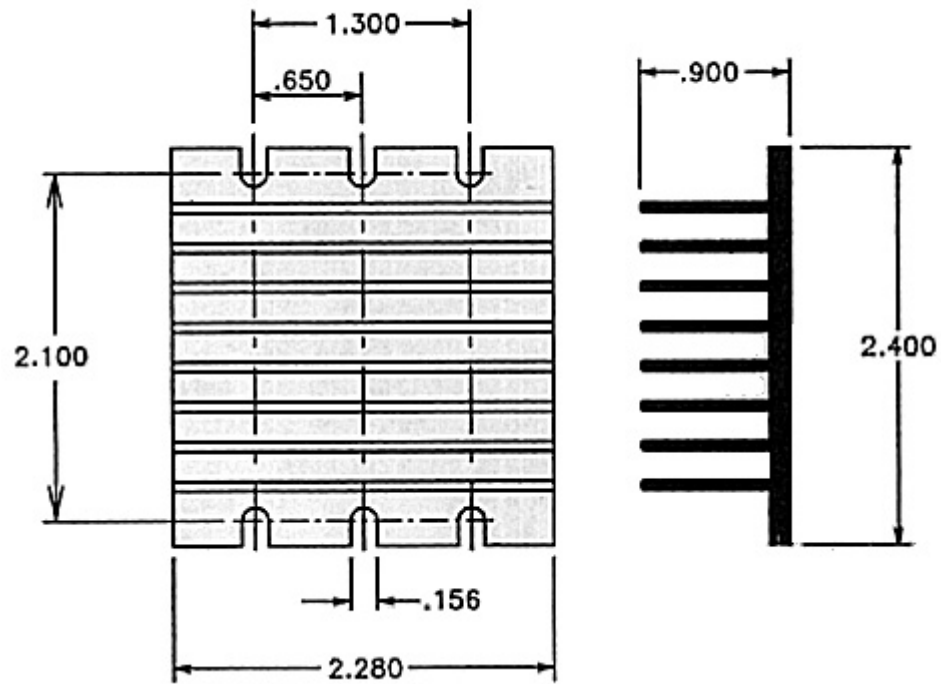

All Measurements are in Inches
Typical Weight: 70 Grams

Thermal Interface

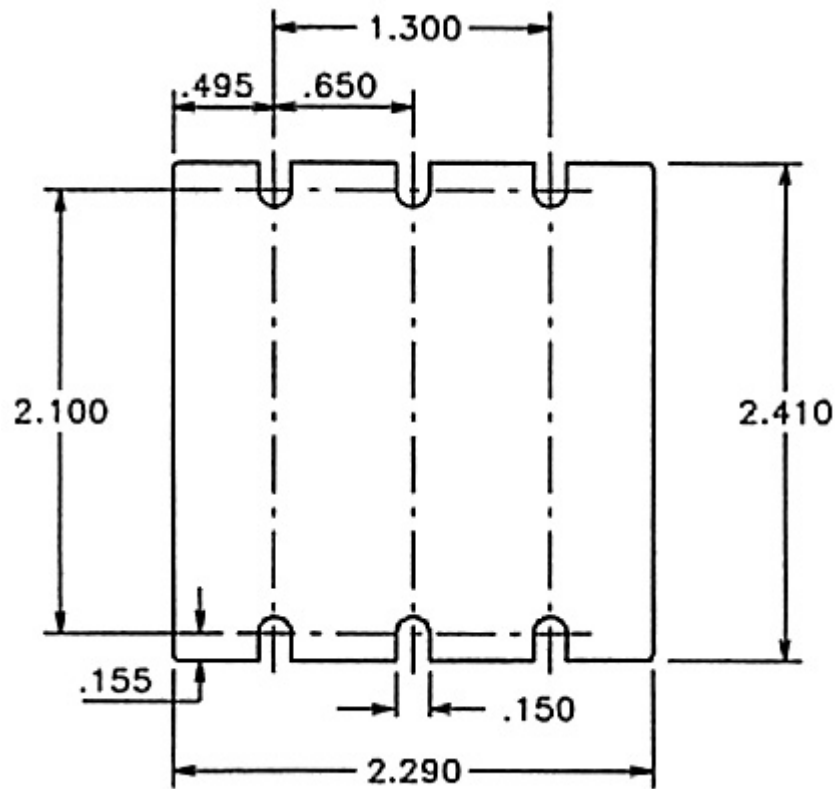

All Dimensions are in Inches

PART LTI = THERMAL INTERFACE

Alloy Aluminum Substrate

Thermal Conductivity (BTU-in/hr sq.ft ° F): 1530

Coefficient of Thermal Expansion (25-100° C, 10 {to the neg. 6th} in-in/° F): 13.1

Hardness, Brinnell B: 23

Endurance Limit, psi: 5000

Standard Thickness (inches): .002

For immediate engineering assistance or to place an order:

Call Toll Free: 800-431-1064

PICO Electronics, Inc.

143 Sparks Ave. Pelham, NY 10803-1810

Tel: 914-738-1400 or Fax: 914-738-8225