


Series P

Single, Dual, and High Voltage


Mechanical Configurations

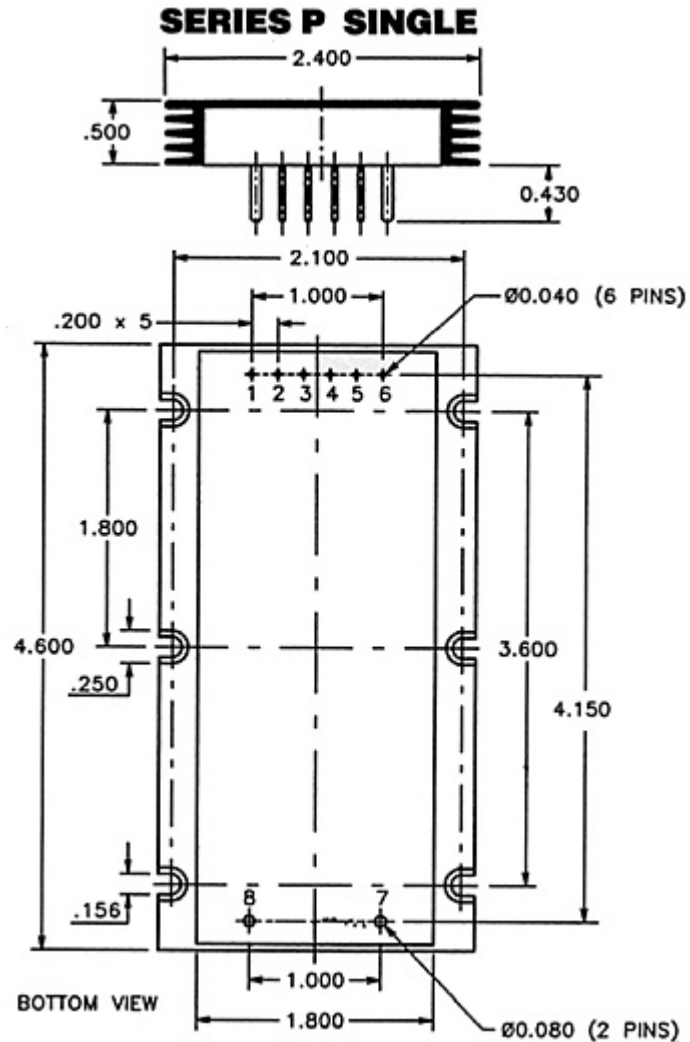

SERIES P SINGLE	
Pin No.	Single
1	+INPUT
2	TRIM DOWN
3	TRIM
4	TRIM UP
5	SHUT DOWN
6	-INPUT
7	-OUTPUT
8	+ OUTPUT
SINGLE: TYPICAL WEIGHT 210 GRAMS	

NOTE: The recommended torque for mounting screws is 6 to 9 In-Lbs.

Includes PA/PB/PC/PD Modules

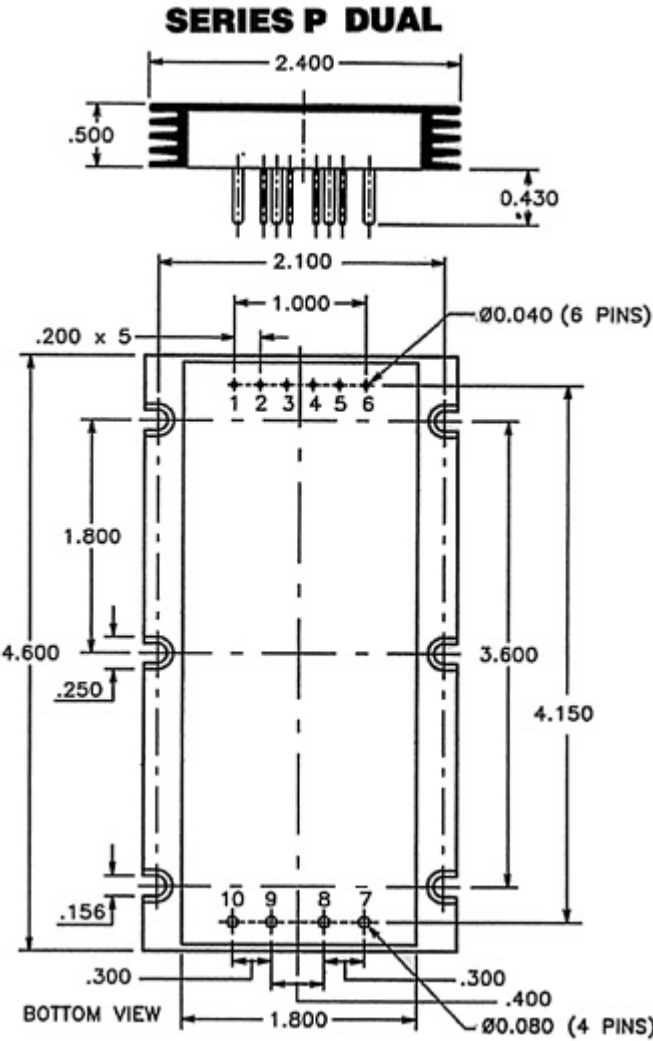



SERIES P DUAL	
Pin No.	DUAL
1	+INPUT
2	TRIM DOWN
3	TRIM
4	TRIM UP
5	SHUT DOWN
6	-INPUT
7	-OUTPUT (1)
8	+ OUTPUT (1)
9	-OUTPUT (2)
10	+ OUTPUT (2)
DUAL: TYPICAL WEIGHT 235 GRAMS	

NOTE: The recommended torque for mounting screws is 6 to 9 In-Lbs.

SERIES P HIGH VOLTAGE

125 Volts and Above

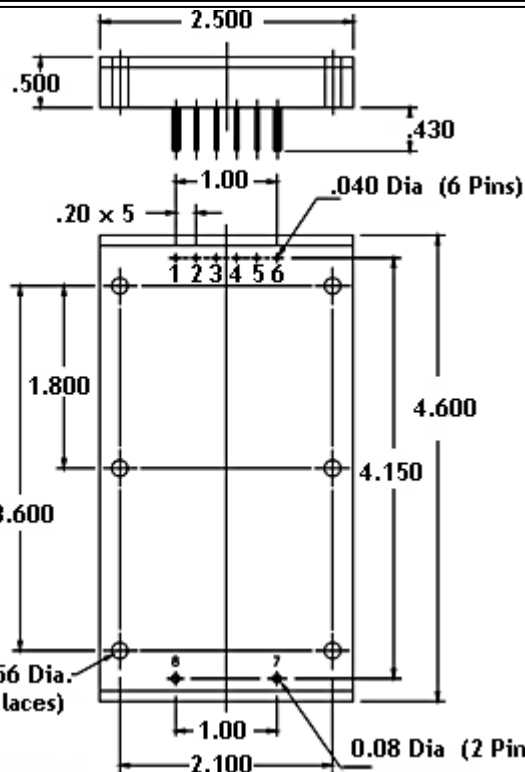

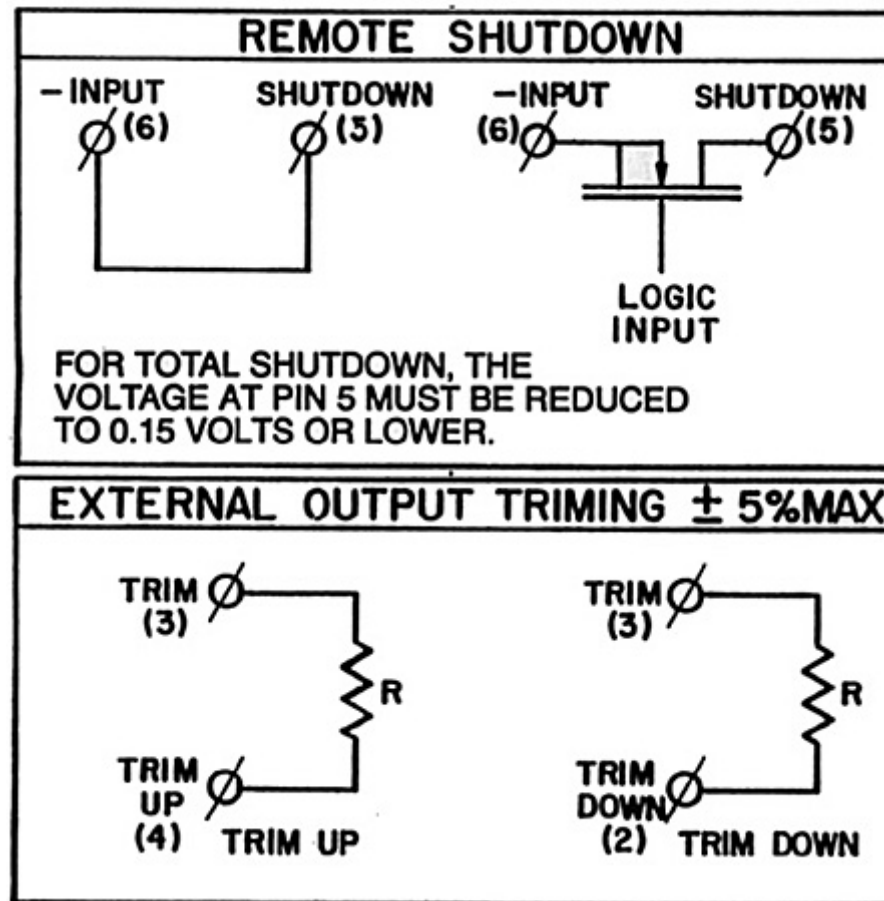

*Typical Resistance Range for Trim Up and Trim Down				
%				
Resistance	1	2	3	5
Trim				
Trim Up	300K	150K	50K	20K
Trim Down	1M	500K	250K	100K

*These units are typical resistance values, as each individual unit will vary slightly.
 Use of trim pot to determine resistance value is recommended.
 Use 1/2 watt minimum power rating resistor.

For immediate engineering assistance or to place an order:

Call Toll Free: 800-431-1064

PICO Electronics, Inc.

143 Sparks Ave. Pelham, NY 10803-1837

Tel: 914-738-1400 or Fax: 914-738-8225