



5VV0.1	3.5	5	60.0	3.00	47	100	6	74	5	116.63
5VV0.2	3.5	5	30.0	1.50	55	200	6	74	3	127.33
5VV0.3	3.5	5	20.0	1.00	60	300	6	74	3	138.03
5VV0.4	3.5	5	15.0	0.75	65	400	6	74	3	148.73
5VV0.5	3.5	5	12.0	0.60	70	500	6	74	3	159.74
5VV0.6	3.5	5	10.0	0.50	75	600	6	74	3	170.92
5VV0.7	3.5	5	8.6	0.43	78	700	6	74	3	182.89
5VV0.8	3.5	5	7.5	0.38	80	800	6	74	3	195.69
5VV0.9	3.5	5	6.7	0.33	85	900	6	74	3	209.38
9VV0.1	4.0	9	70.0	3.50	30	100	7	74	5	116.63
9VV0.2	4.0	9	35.0	1.75	60	200	7	74	3	127.33
9VV0.3	4.0	9	23.3	1.17	90	300	7	74	3	138.03
9VV0.4	4.0	9	17.5	0.88	120	400	7	74	3	148.73
9VV0.5	4.0	9	14.0	0.70	150	500	7	74	3	159.74
9VV0.6	4.0	9	11.7	0.58	205	600	7	74	3	170.92
9VV0.7	4.0	9	10.0	0.50	240	700	7	74	3	182.89
9VV0.8	4.0	9	8.8	0.44	274	800	7	74	3	195.69
9VV0.9	4.0	9	7.8	0.39	308	900	7	74	3	209.38
12VV0.1	4.0	12	80.0	4.00	30	100	8	82	5	116.63
12VV0.2	4.0	12	40.0	2.00	60	200	8	82	3	127.33
12VV0.3	4.0	12	26.7	1.33	90	300	8	82	3	138.03
12VV0.4	4.0	12	20.0	1.00	120	400	8	82	3	148.73
12VV0.5	4.0	12	16.0	0.80	150	500	8	84	3	159.74
12VV0.6	4.0	12	13.3	0.67	176	600	8	84	3	170.92
12VV0.7	4.0	12	11.4	0.57	205	700	8	84	3	182.89
12VV0.8	4.0	12	10.0	0.50	235	800	8	84	3	195.69
12VV0.9	4.0	12	8.9	0.44	264	900	8	84	3	209.38
15VV0.1	5.0	15	85.0	4.25	30	100	8.5	82	5	116.63
15VV0.2	5.0	15	42.5	2.13	60	200	8.5	82	3	127.33
15VV0.3	5.0	15	28.3	1.42	90	300	8.5	82	3	138.03
15VV0.4	5.0	15	21.3	1.06	120	400	8.5	83	3	148.73
15VV0.5	5.0	15	17.0	0.85	150	500	8.5	83	3	159.74
15VV0.6	5.0	15	14.2	0.71	176	600	8.5	83	3	170.92
15VV0.7	5.0	15	12.1	0.61	205	700	8.5	83	3	182.89
15VV0.8	5.0	15	10.6	0.53	235	800	8.5	83	3	195.69
15VV0.9	5.0	15	9.4	0.47	264	900	8.5	83	3	209.38
24VV0.1	6.0	24	90.0	4.50	23	100	9	83	5	116.63
24VV0.2	6.0	24	45.0	2.25	48	200	9	83	3	127.33
24VV0.3	6.0	24	30.0	1.50	70	300	9	83	3	138.03
24VV0.4	6.0	24	22.5	1.13	95	400	9	83	3	148.73
24VV0.5	6.0	24	18.0	0.90	100	500	9	83	3	159.74
24VV0.6	6.0	24	15.0	0.75	132	600	9	83	3	170.92
24VV0.7	6.0	24	12.9	0.64	154	700	9	83	3	182.89
24VV0.8	6.0	24	11.3	0.56	176	800	9	83	3	195.69
24VV0.9	6.0	24	10.0	0.50	198	900	9	83	3	209.38
28VV0.1	7.0	28	100.0	5.00	23	100	10	83	5	116.63
28VV0.2	7.0	28	50.0	2.50	48	200	10	83	3	127.33
28VV0.3	7.0	28	33.3	1.67	70	300	10	83	3	138.03
28VV0.4	7.0	28	25.0	1.25	95	400	10	83	3	148.73
28VV0.5	7.0	28	20.0	1.00	120	500	10	83	3	159.74
28VV0.6	7.0	28	16.7	0.83	132	600	10	83	3	170.92
28VV0.7	7.0	28	14.3	0.71	154	700	10	83	3	182.89
28VV0.8	7.0	28	12.5	0.63	176	800	10	83	3	195.69
28VV0.9	7.0	28	11.1	0.56	198	900	10	83	3	209.38
48VV0.1	14.0	48	80.0	4.00	27	100	8	81	5	116.63
48VV0.2	14.0	48	40.0	2.00	50	200	8	81	3	127.33
48VV0.3	14.0	48	26.7	1.33	73	300	8	81	3	138.03
48VV0.4	14.0	48	20.0	1.00	98	400	8	81	3	148.73
48VV0.5	14.0	48	16.0	0.80	140	500	8	84	3	159.74
48VV0.6	14.0	48	13.3	0.67	154	600	8	84	3	170.92
48VV0.7	14.0	48	11.4	0.57	180	700	8	84	3	182.89
48VV0.8	14.0	48	10.0	0.50	205	800	8	84	3	195.69
48VV0.9	14.0	48	8.9	0.44	208	900	8	84	3	209.38


\* All units require a 0.1uF, 2KV ceramic capacitor across the output

\*\* Unit is capable of sourcing Maximum Load Current over entire Input Voltage Range

**Safety Note:**The high voltage power supplies described in this datasheet generate voltages which can be lethal. They should only be installed and used by personnel who have received the appropriate training and who are fully aware of the hazards that exist.


## SERIES VV

C=0.1uF, 2KV

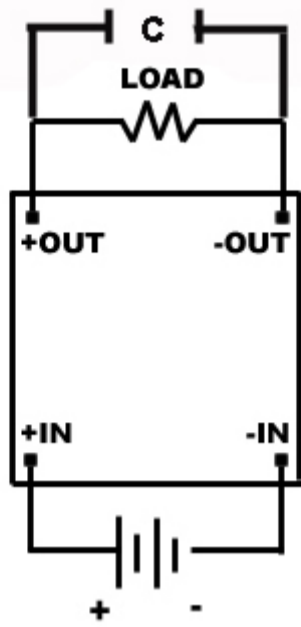




BOTTOM VIEW

Input Voltage may be Positive or Negative

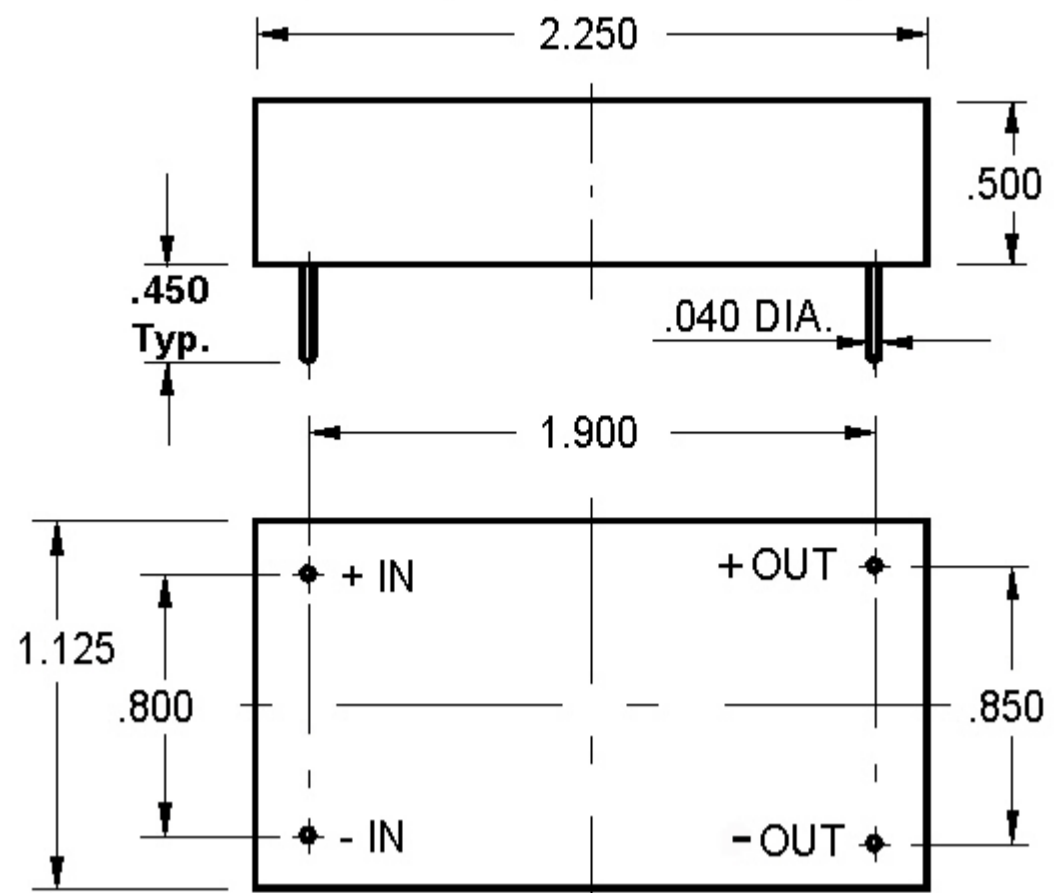

BOTTOM VIEW

Measurements in Inches  
Typical Weight: 45 grams

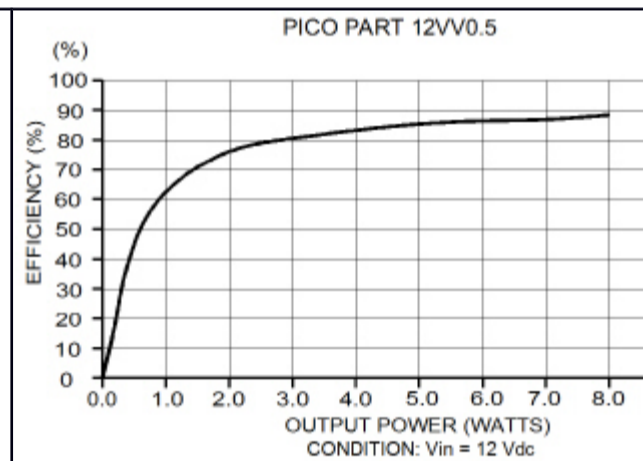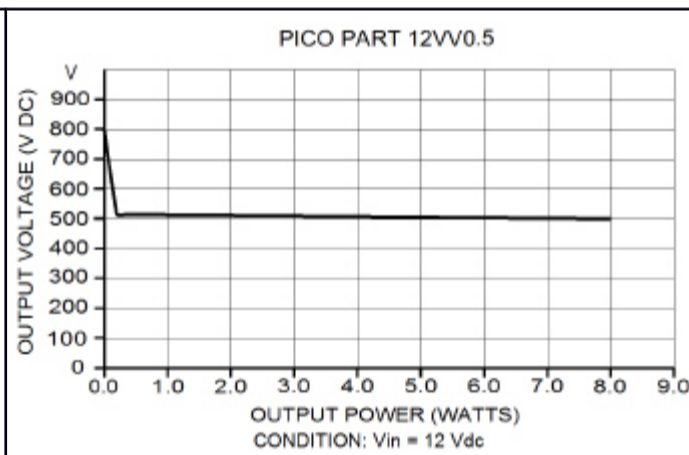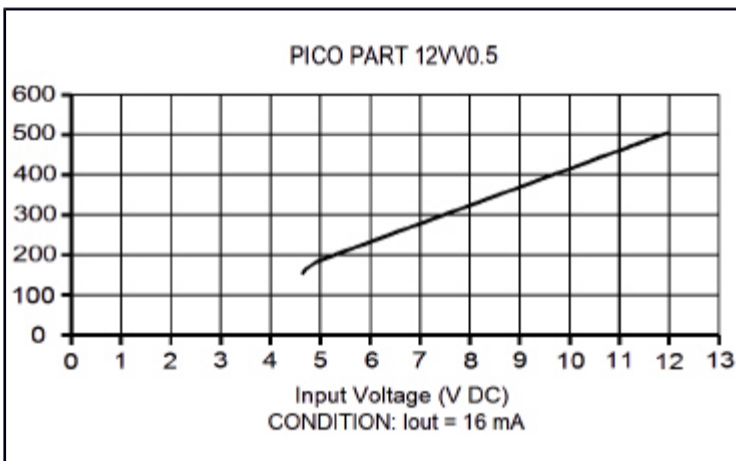

For immediate engineering assistance or to place an order:  
Call Toll Free: 800-431-1064

## PICO Electronics, Inc.

143 Sparks Ave. Pelham, NY 10803-1810  
Tel: 914-738-1400 or Fax: 914-738-8225

[Go back to DC-DC Converter menu](#) [1]