

10AC5S	5	2000	10	75	50	0.5	0.5	0.2	250.62
10AC12S	12	833	10	77	50	0.5	0.5	0.2	250.62
10AC15	15	666	10	79	50	0.5	0.5	0.2	250.62
10AC24S	24	416	10	80	50	0.5	0.5	0.2	250.62

*Readings Taken at 115VAC-60Hz. at full load

**10% minimum load required

*** All units available with 170-240VAC input. Add H prefix to part number - \$40 per unit cost added.

**Series 10AC Dual Output
Input Voltage 90-130VAC (47-440Hz)
(Optional 170-240VAC, 47-440 Hz)*****

Pico Part No.	Output Voltage (VDC)	Max. Load Current (mA) per output	Max. Output Power (watts) per output	EFF @ Full Load Typical (%)*	Output Voltage Ripple @ Full Ld. 1-1 MHz BW mv p-p	Output Voltage Tolerance (± %)*	V LD. Reg. 10%-100% Load ** (± %)*	Line Regulation (± %)*	Price (US \$)
10AC5D	± 5	1000	5	75	50	0.5	0.5	0.2	282.10
10AC12D	± 12	417	5	77	50	0.5	0.5	0.2	282.10
10AC15D	± 15	333	5	80	50	0.5	0.5	0.2	282.10


*Readings Taken at 115VAC-60Hz. at full load each output

**10% minimum load required

*** All units available with 170-240VAC input. Add H prefix to part number - \$40 per unit cost added.

Call Factory for Options Available per MIL-STD-883:

- Expanded operating temperature (-55° C to +85° C)
- Stabilization Bake: (125° C ambient)
- Temperature Cycle: -55° C. to +125° C
- Hi Temp, Burn in

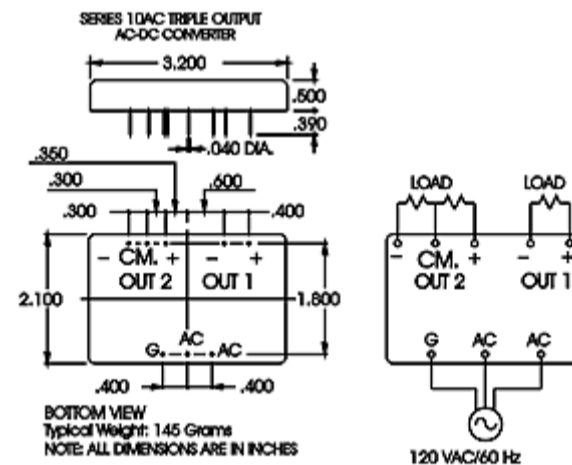

Larger Size Drawing [3]

**Series 10AC Triple Output
Input Voltage 90-130VAC (47-440Hz)
(Optional 170-240VAC, 47-440 Hz)*****

Pico Part No.	Main Output Voltage					Auxiliary Output Voltage					EFF @ Full Load Typical (%)	Price (US \$)
	Output Voltage (VDC)	Max. Load Current (mA)	Max. Output Power (watts)	V LD. Reg. 25%-100% Load (± %)*	Output Voltage Ripple @ Full Ld. 1-1 MHz BW mv p-p	Output Voltage DC Per Output	Max. Load Current (mA) Per Output	Max. Output Power (watts) Per Output	Volt. Load Reg. 25%-100% Load** (± %)*	Output Ripple @ Full Ld. 1-1 MHz BW mv p-p*		
10AC5T12	5	1400	7	0.5	50	± 12	125	1.5	5	50	77	313.59
10AC5T15	5	1400	7	0.5	50	± 15	100	1.5	5	50	77	313.59
10AC12T5	12	583	7	0.5	50	± 5	300	1.5	5	50	77	313.59
10AC15T5	15	466	7	0.5	50	± 5	300	1.5	5	50	79	313.59

	Common Characteristics Main Output Voltage Tolerance $\pm 0.5\%$ Main Line Regulation $\pm 0.2\%$	Common Characteristics Auxiliary Output Voltage Tolerance $\pm 5\%$ Auxillary Line Regulation $\pm 0.2\%$	
*Measurements Taken at 115VAC-60Hz. **10% minimum load required ***All units available with 170-240VAC input. Add H prefix to part number - \$40 per unit cost added.			

For immediate engineering assistance or to place an order:

Call Toll Free: 800-431-1064

PICO Electronics, Inc.

143 Sparks Ave. Pelham, NY 10803-1810

Tel: 914-738-1400

Fax: 914-738-8225
