


Series LP/LF/LM

Single, Dual, and High Voltage

Mechanical Configurations

SERIES LP/LF/LM SINGLE


SERIES LP/LF/LM HIGH VOLTAGE SINGLE

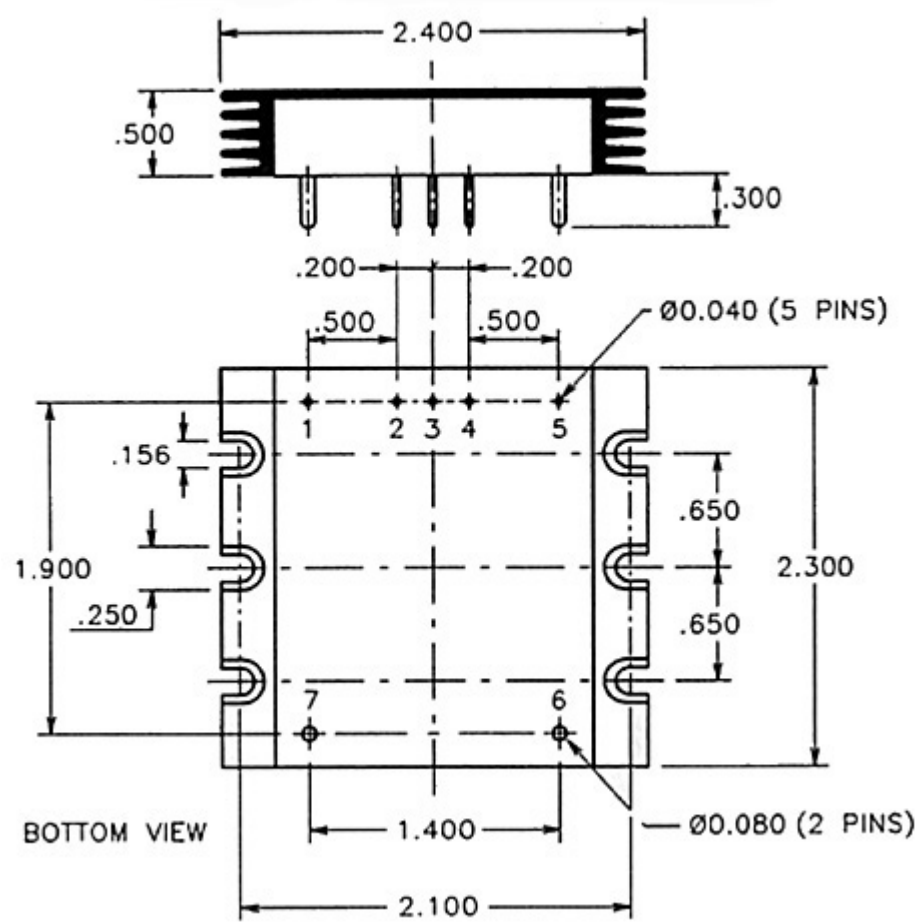

Typical Weight: 110 Grams; Dimensions in Inches  
Note: The recommended torque for mounting screws is 6 to 9 In-Lbs.

SERIES LP/LF/LM SINGLE	
PIN No.	SINGLE
1	+ INPUT
2	TRIM DOWN
3	TRIM
4	SHUT DOWN
5	-INPUT
6	-OUTPUT
7	+OUTPUT
Typical Weight: 110 Grams Dimensions in Inches	

## SERIES LP/LF/LM DUAL

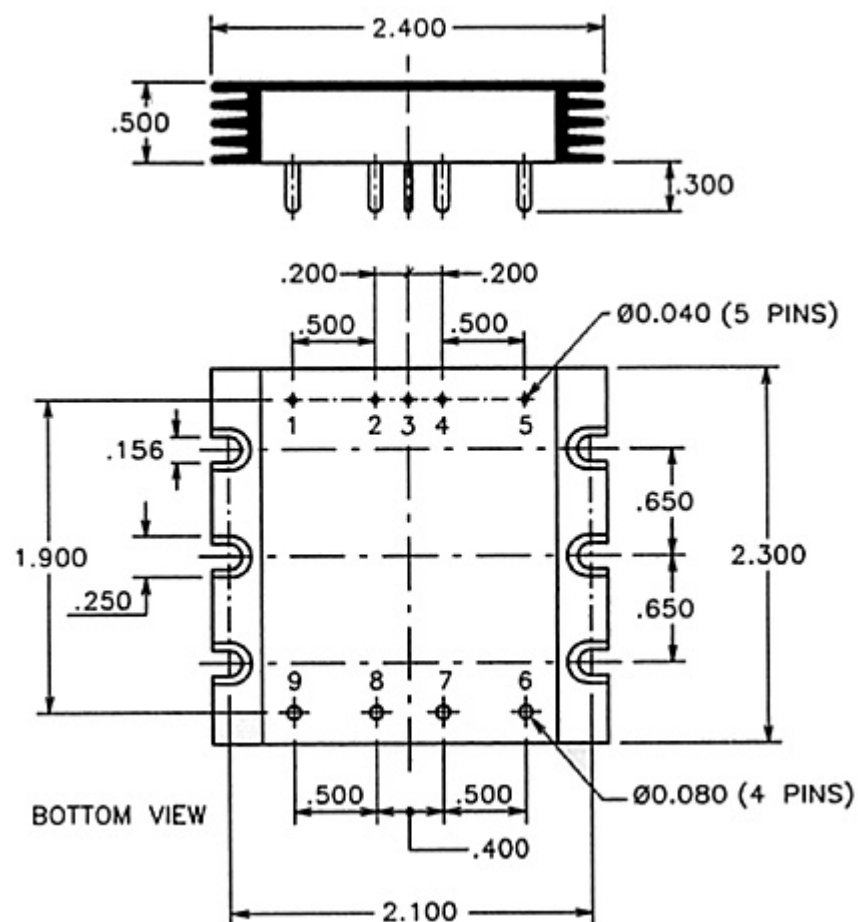


Typical Weight: 135 Grams; Dimensions in Inches

Note: The recommended torque for mounting screws is 6 to 9 In-Lbs.

## SERIES LP/LF/LM DUAL

Pin No.	DUAL
1	+INPUT
2	TRIM DOWN
3	TRIM
4	SHUT DOWN
5	-INPUT
6	-OUTPUT 1
7	+ OUTPUT 1
8	-OUTPUT 2
9	+ OUTPUT 2

Typical Weight: 135 Grams  
Dimensions in Inches

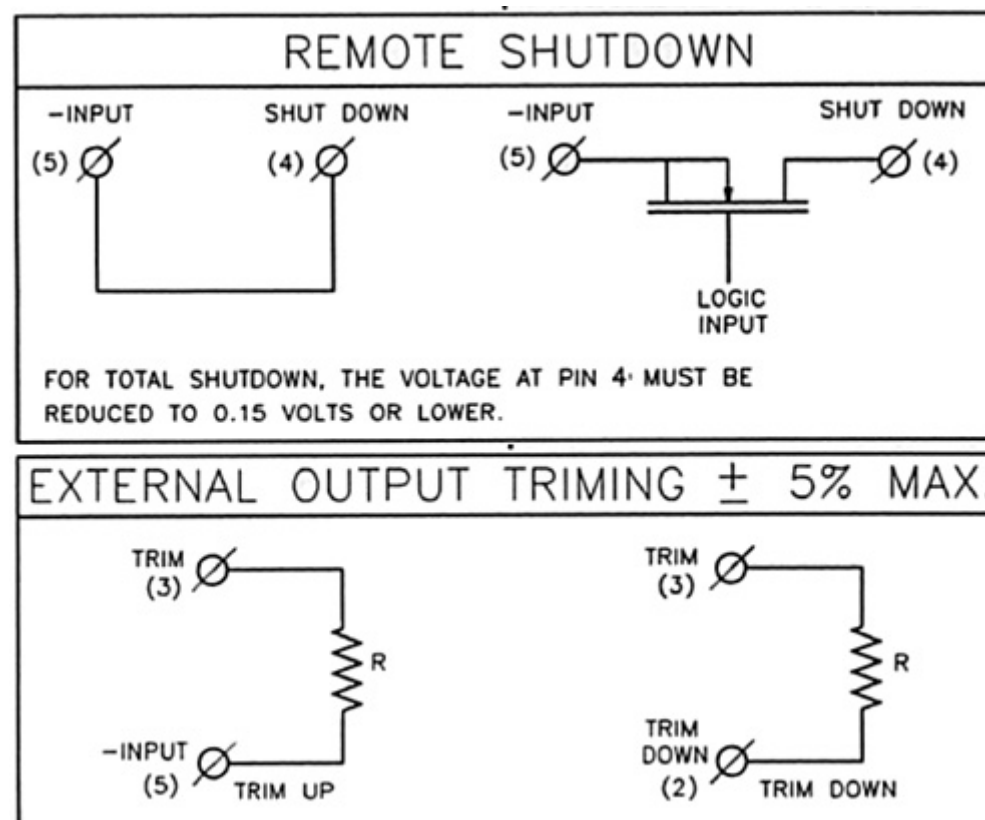

*Typical Resistance Range for Trim Up and Trim Down				
%				
Resistance	1	2	3	5
Trim				
Trim Up	300K	150K	50K	20K
Trim Down	1M	500K	250K	100K

\*These units are typical resistance values, as each individual unit will vary slightly.  
Use of trim pot to determine resistance value is recommended.  
Use 1/2 watt minimum power rating resistor.

---

For immediate engineering assistance or to place an order:

**Call Toll Free: 8000-431-1064**

**PICO Electronics, Inc.**

143 Sparks Ave. Pelham, NY 10803-1837

Tel: 914-738-1400 or Fax: 914-738-8225

---