

Series PLR

5W Isolated Regulated Low Profile DC-DC Converter



PRODUCT OVERVIEW

The PLR series is an isolated DC-DC converter with wide input range, tight regulation and six-sided shielded case. These modules have trim and control features. Single and dual isolated output models are standard. They can operate up to 5W over the temperature range of -25°C to +70°C without derating, a heat sink or active cooling.



FEATURES

- Up to 5W output at +70°C ambient
 - Low profile – 0.300" height
 - Up to 3.33:1 input voltage range
 - 3.3 to 100V output models
 - Six-sided shielded case
 - Control feature
 - Trimmable output
 - Input/output isolation
 - Single and dual isolated output
 - No external components required
 - No heat sink or derating required
- Contact Pico for part number of available options:

 - Expanded operating temp: -55°C to +85°C
 - Select screening per MIL-STD-883:
 - Stabilization Bake
 - Temperature Cycle
 - Burn-In
 - Special Input Voltage, Output Voltage, Isolation Voltage or Output Power

PLR	F	28	S
SERIES NAME	INPUT VOLTAGE RANGE	NOM. OUTPUT VOLTAGE	NUMBER OF OUTPUTS
PLR	E = 5 to 15V F = 8 to 24V A = 18 to 36V B = 36 to 60V C = 18 to 60V	3.3 = 3.3V 5 = 5V 5.2 = 5.2V 9 = 9V 12 = 12V 15 = 15V 24 = 24V 28 = 28V 48 = 48V 100 = 100V	S = SINGLE D = DUAL

MODEL LIST**SINGLE OUTPUTS**

Through Hole	Output Voltage [VDC]	Output Current		Output Power	Efficiency @ Full Load	Input Current @ Full Load	Line Regulation	Load Regulation 25-100%	Output Ripple @ 1MHz BW	Output Voltage Tolerance
		Min. [mA]	Max. [mA]	[W]	[%] typ.	[%] typ.	[±%]	[±%]	[mVp-p]	[±%]
PLRE3.3S	3.3	90.9	909	3	75	400	2.75	3	200	1
PLRE5S	5	60	600	3	78	385	2	1.75	175	0.75
PLR5.2S	5.2	57.7	577	3	78	385	2	1.75	175	0.75
PLRE9S	9	44.4	444	4	78	515	1.5	1.5	125	0.5
PLRE12S	12	33.3	333	4	79	505	1.25	1.25	125	0.5
PLRE15S	15	26.7	267	4	79	505	1.25	1.25	125	0.5
PLRE24S	24	16.7	167	4	80	500	1.25	1	125	0.5
PLRE28S	28	14.3	143	4	80	500	1	1	125	0.5
PLRE48S	48	8.3	83	4	80	500	1	1	300	0.5
PLRE100S	100	4	40	4	80	500	1	1	300	0.5
PLRF3.3S	3.3	121.2	1212	4	75	333	2.75	3	200	1
PLRF5S	5	100	1000	5	78	400	2	1.75	150	0.75
PLRF5.2S	5.2	96.1	961	5	78	400	2	1.75	150	0.75
PLRF9S	9	55.6	556	5	78	400	1.5	1.5	125	0.5
PLRF12S	12	41.7	417	5	79	395	1.25	1.25	125	0.5
PLRF15S	15	33.3	333	5	79	395	1.25	1.25	125	0.5
PLRF24S	24	20.8	208	5	80	390	1.25	1	125	0.5
PLRF28S	28	17.9	179	5	80	390	1	1	125	0.5
PLRF48S	48	10.4	104	5	80	390	1	1	250	0.5
PLRF100S	100	5	50	5	80	390	1	1	300	0.5
PLRA3.3S	3.3	121.2	1212	4	76	195	1.5	3	150	1
PLRA5S	5	100	1000	5	76	245	1	2	100	0.75
PLRA5.2S	5.2	96.1	961	5	76	245	1	2	100	0.75
PLRA9S	9	55.6	556	5	76	245	0.5	2	100	0.5
PLRA12S	12	41.7	417	5	77	240	0.5	2	100	0.5
PLRA15S	15	33.3	333	5	79	235	0.5	1.5	100	0.5
PLRA24S	24	20.8	208	5	80	230	0.5	1.5	100	0.5
PLRA28S	28	17.9	179	5	80	230	0.5	1.5	100	0.5
PLRA48S	48	10.4	104	5	80	230	0.5	1	250	0.5
PLRA100S	100	5	50	5	80	230	1	1	300	0.5

MODEL LIST**SINGLE OUTPUTS**

Through Hole	Output Voltage [VDC]	Output Current		Output Power [W]	Efficiency ⁽¹⁾ [%] typ.	Input Current ⁽¹⁾ [%] typ.	Line Regulation [±%]	Load Regulation 25-100% [±%]	Output Ripple @ 1MHz BW [mVp-p]	Output Voltage Tolerance ⁽¹⁾ [±%]
		Min. [mA]	Max. [mA]							
PLRB3.3S	3.3	121.2	1212	4	74	113	1.5	3	150	1
PLRB5S	5	100	1000	5	74	140	0.5	1.75	100	0.75
PLRB5.2S	5.2	96.1	961	5	74	140	0.5	1.75	100	0.75
PLRB9S	9	55.6	556	5	74	140	0.5	1.5	100	0.5
PLRB12S	12	41.7	417	5	74	140	0.25	1	100	0.5
PLRB15S	15	33.3	333	5	76	135	0.25	1	100	0.5
PLRB24S	24	20.8	208	5	76	135	0.25	0.75	100	0.5
PLRB28S	28	17.9	179	5	76	135	0.25	0.75	100	0.5
PLRB48S	48	10.4	104	5	76	135	0.25	0.75	200	0.5
PLRB100S	100	5	50	5	76	135	1	1	300	0.5
PLRC3.3S	3.3	121.2	1212	4	74	139	1.75	3	150	1
PLRC5S	5	100	1000	5	75	170	1.5	2	100	0.75
PLRC5.2S	5.2	96.1	961	5	75	170	1.5	2	100	0.75
PLRC9S	9	55.6	556	5	75	170	1	1.5	100	0.5
PLRC12S	12	41.7	417	5	75	170	0.75	1	100	0.5
PLRC15S	15	33.3	333	5	77	165	0.75	1	100	0.5
PLRC24S	24	20.8	208	5	78	165	0.75	0.75	100	0.5
PLRC28S	28	17.9	179	5	78	165	0.75	0.75	100	0.5
PLRC48S	48	10.4	104	5	78	165	0.75	0.75	225	0.5
PLRC100S	100	5	50	5	78	165	1	1	300	0.5

Note 1: Tested at nominal input voltage and full output load.

DUAL OUTPUTS

Through Hole	Output Voltage Per Output [VDC]	Output Current Per Output		Output Power Per Output [W]	Efficiency ⁽¹⁾ [%] typ.	Input Current ⁽¹⁾ [%] typ.	Line Regulation [±%]	Load Regulation 25-100% [±%]	Output Ripple Per Output @ 1MHz BW [mVp-p]	Output Voltage Tolerance ⁽¹⁾ [±%]
		Min. [mA]	Max. [mA]							
PLRE5D	5	30	300	1.5	78	385	2	1.75	175	0.75
PLRE9D	9	22.2	222	2	78	515	1.5	1.5	125	0.5
PLRE12D	12	16.7	167	2	79	505	1.25	1.25	125	0.5
PLRE15D	15	13.4	134	2	79	505	1.25	1.25	125	0.5
PLRE24D	24	8.4	84	2	80	500	1.25	1	125	0.5
PLRE28D	28	7.2	72	2	80	500	1	1	125	0.5
PLRE48D	48	4.2	42	2	80	500	1	1	300	0.5

Note 1: Tested at nominal input voltage and full output load.

Note 2: Dual output loads must be balanced.

MODEL LIST

Through Hole	Output Voltage Per Output [VDC]	Output Current Per Output		Output Power Per Output [W]	Efficiency ⁽¹⁾ [%] typ.	Input Current ⁽¹⁾ [%] typ.	Line Regulation [±%]	Load Regulation 25-100% [±%]	Output Ripple Per Output @ 1MHz BW [mVp-p]	Output Voltage Tolerance ⁽¹⁾ [±%]
		Min. [mA]	Max. [mA]							
PLRF5D	5	50	500	2.5	78	400	2	1.75	100	0.75
PLRF9D	9	27.8	278	2.5	78	400	1.5	1.5	125	0.5
PLRF12D	12	20.8	208	2.5	79	395	1.25	1.25	125	0.5
PLRF15D	15	16.7	167	2.5	79	395	1.25	1.25	125	0.5
PLRF24D	24	10.4	104	2.5	80	390	1.25	1	125	0.5
PLRF28D	28	8.9	89	2.5	80	390	1	1	125	0.5
PLRF48D	48	5.2	52	2.5	80	390	1	1	250	0.5
PLRA5D	5	50	500	2.5	76	245	1	2	100	0.75
PLRA9D	9	27.8	278	2.5	76	245	0.5	2	100	0.5
PLRA12D	12	20.8	208	2.5	77	240	0.5	2	100	0.5
PLRA15D	15	16.7	167	2.5	79	235	0.5	1.5	100	0.5
PLRA24D	24	10.4	104	2.5	80	230	0.5	1.5	100	0.5
PLRA28D	28	8.9	89	2.5	80	230	0.5	1.5	100	0.5
PLRA48D	48	5.2	52	2.5	80	230	0.5	1	250	0.5
PLRB5D	5	50	500	2.5	74	140	0.5	1.75	100	0.75
PLRB9D	9	27.8	278	2.5	74	140	0.5	1.5	100	0.5
PLRB12D	12	20.8	208	2.5	74	140	0.25	1	100	0.5
PLRB15D	15	16.7	167	2.5	76	135	0.25	1	100	0.5
PLRB24D	24	10.4	104	2.5	76	135	0.25	0.75	100	0.5
PLRB28D	28	8.9	89	2.5	76	135	0.25	0.75	100	0.5
PLRB48D	48	5.2	52	2.5	76	135	0.25	0.75	200	0.5
PLRC5D	5	50	500	2.5	75	170	1.5	2	100	0.75
PLRC9D	9	27.8	278	2.5	75	170	1	1.5	100	0.5
PLRC12D	12	20.8	208	2.5	75	170	0.75	1	100	0.5
PLRC15D	15	16.7	167	2.5	77	165	0.75	1	100	0.5
PLRC24D	24	10.4	104	2.5	78	165	0.75	0.75	100	0.5
PLRC28D	28	8.9	89	2.5	78	165	0.75	0.75	100	0.5
PLRC48D	48	5.2	52	2.5	78	165	0.75	0.75	225	0.5

Note 1: Tested at nominal input voltage and full output load.

Note 2: Dual output loads must be balanced.

SPECIFICATIONS (Nominal V_{IN} , Full Load, $T_A = +25^{\circ}\text{C}$, 1 hour warm up unless otherwise specified)**INPUT**

Parameter	Condition	Min.	Typ.	Max.	Units
Input Voltage Range	PLRE models	5	10	15	VDC
	PLRF models	8	16	24	
	PLRA models	18	27	36	
	PLRB models	36	48	60	
	PLRC models	18	39	60	

ENVIRONMENTAL

Parameter	Condition	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient without derating	-25	-	+70	$^{\circ}\text{C}$
Storage Temperature Range	Ambient	-55	-	+125	$^{\circ}\text{C}$
Temperature Coefficient		-	-	0.02	$\%/^{\circ}\text{C}$
Cooling	Free Air Convection				

GENERAL

Parameter	Condition	Min.	Typ.	Max.	Units
Isolation Voltage	Input to output	500	-	-	VDC
	OUT1 to OUT2	500	-	-	
Switching Frequency		-	40	-	kHz
Size (L x W x H)		1.92 x 1.52 x 0.3 (48.768 x 38.608 x 7.62)			inches (mm)
Weight		-	40	-	grams
Case	6-Sided Epoxy Insulated Metal				
Potting	Vacuum Impregnated Epoxy				
Box Packaging	8 x 7.5 x 1.5 (203.2 x 190.5 x 38.1) or 12 x 9 x 1.5 (304.8 x 228.6 x 38.1)				inches (mm)

PROTECTION & FEATURES

Parameter	Condition	Min.	Typ.	Max.	Units
Shortcircuit	Temporary				
Shutdown (C)	Non-latched shutdown, Self-recovery	Shutdown	Connect to -IN		
		Restart	OPEN		
Output Voltage Trim (TRIM)	Trim up only	0	-	5	%

DESIGNED TO MEET


Test	Referenced Standard	Description
Vibration	MIL-STD-202	Method 204, Vibration, High Frequency, Condition D
Shock	MIL-STD-202	Method 213, Shock (Specified Pulse), Condition I
Humidity	MIL-STD-202	Method 106, Moisture Resistance
Altitude	MIL-STD-202	Method 105, Barometric Pressure (Reduced), Condition D

OPTIONS AVAILABLE – CONTACT PICO FOR PART NUMBER


Parameter	Referenced Standard	Description
Stabilization Bake	MIL-STD-883	Referenced Method 1008 Non-operating maximum storage temperature for 24 hours
Temperature Cycle	MIL-STD-883	Referenced Method 1010 Non-operating at temperature extremes, 15 mins/temp, 10 cycles
Burn-In	MIL-STD-883	Referenced Method 1015 Max operating temperature for 160 hours
Expanded Ambient Operating Temperature		-55 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$

TYPICAL CONNECTION CIRCUIT


SINGLE OUTPUT

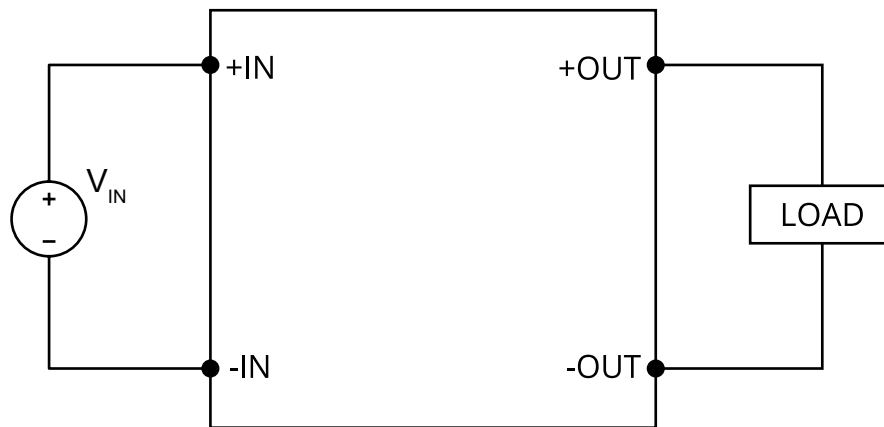

DUAL OUTPUT

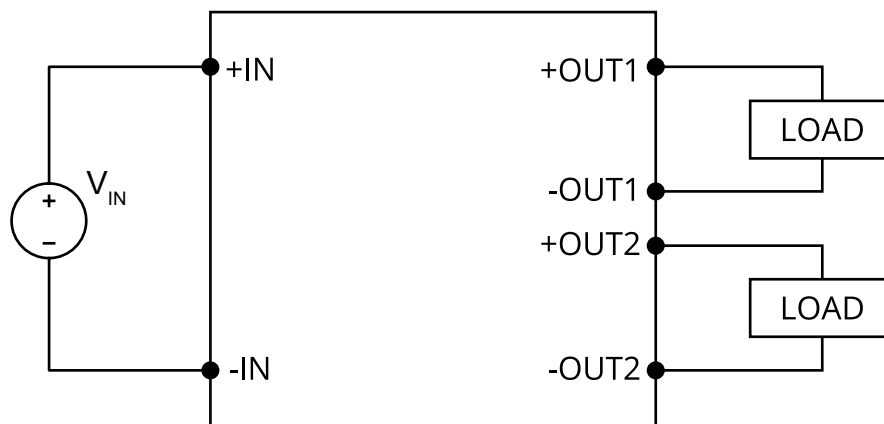


TRIM

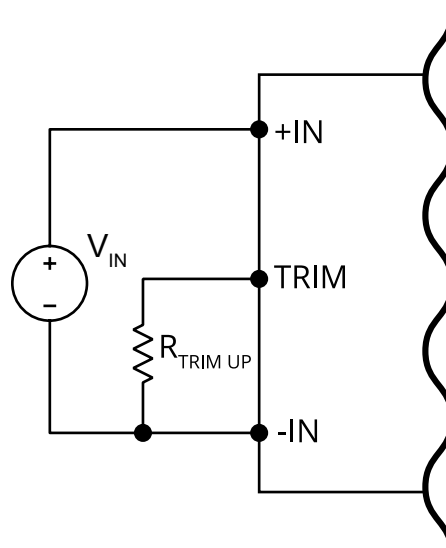


Note: Use 50k Ω , 1/4W trim pot between TRIM and -IN. Reduce resistance to raise output voltage to 5% maximum. Raising the output voltage beyond 5% could cause damage to the module.

MECHANICAL DRAWINGS

SINGLE OUTPUT

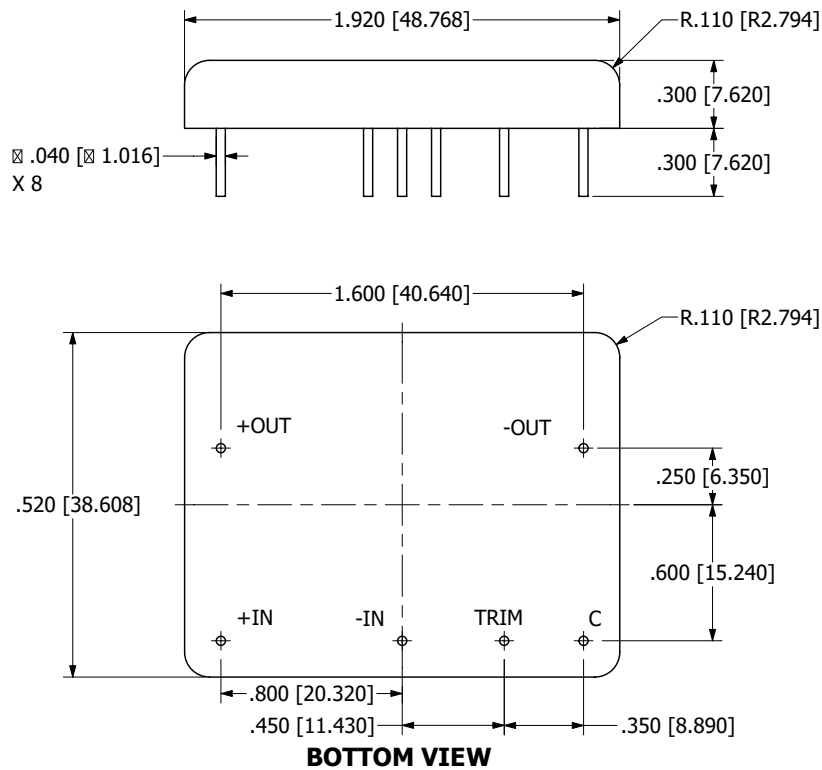




DUAL OUTPUT

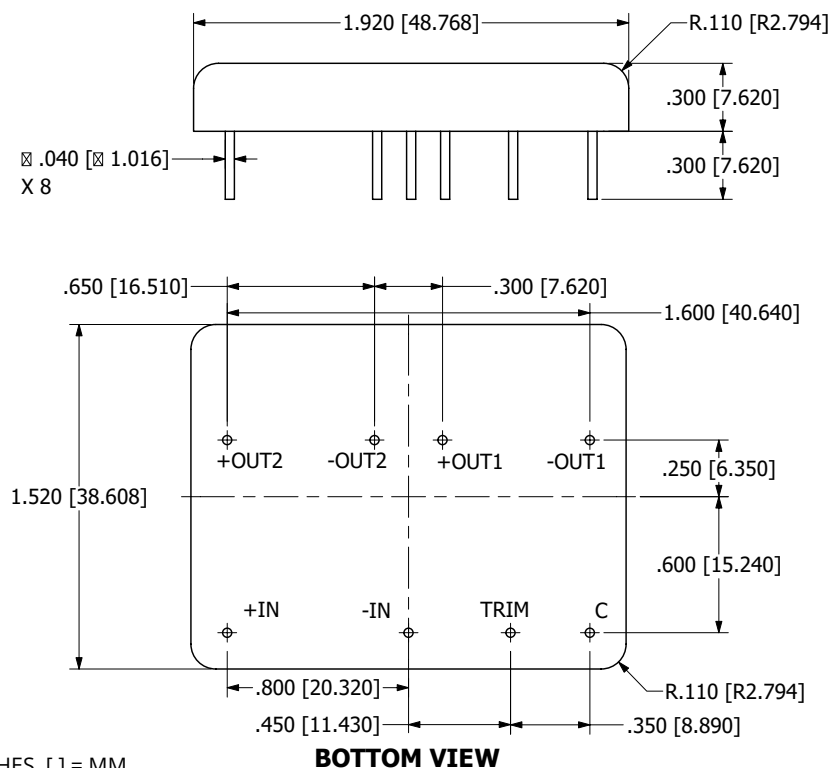

NOTES

- a. ALL DIMENSIONS ARE IN INCHES, [] = MM
- b. C IS CONTROL PIN



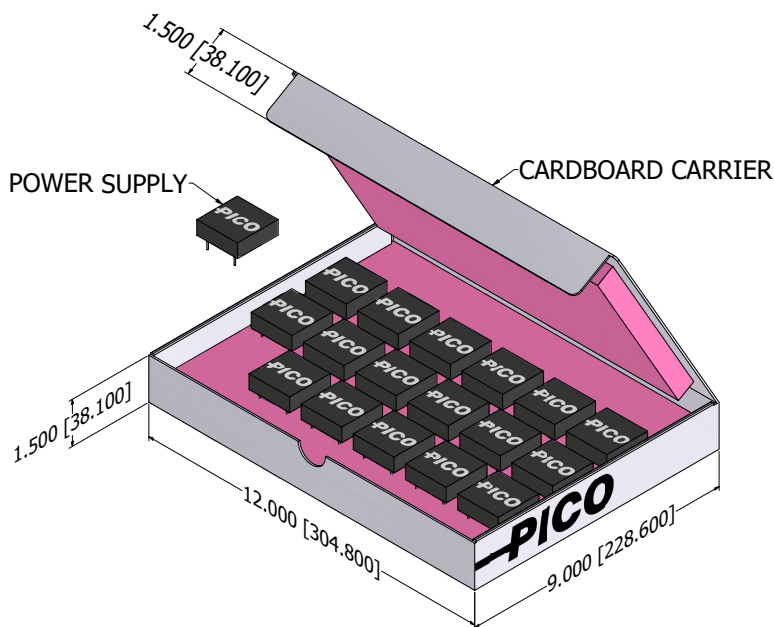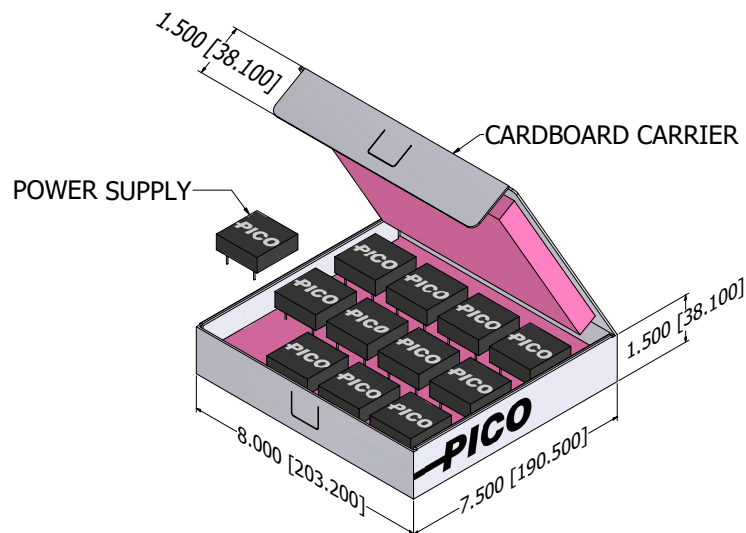

Pico warrants each product manufactured by us and sold by us or an authorized representative, to be free from defects in material and workmanship. If properly used, it will perform within its applicable specifications for a period of one year after original shipment. Pico's obligation under this guarantee is limited to repairing or replacing our product to the original purchaser. This warranty is in lieu of all other warranties, express or implied and constitutes fulfillment of our obligations to the purchaser. We do not guarantee that the products can be used for a particular purpose other than those solely covered by the product's specifications. Pico must be notified if the product must meet particular certifications and/or standards. We assume no liability, in any event, for consequential damages, for anticipated or lost profits, incidental damages or loss of time or other losses incurred by the purchaser or any third party in connection with products covered by this warranty or otherwise. The purchaser will indemnify and hold Pico harmless for any damages, losses, costs, etc. from usage not within the product's specifications. Pico must be consulted before usage of its products in a nuclear, radioactive or space environment.

We reserve the right to discontinue products without notice, We reserve the right to make modifications to any existing catalog products without notice, at any time, without the obligation to modify units previously sold.