

Series 30AC

30W Isolated Regulated AC-DC Power Supply

PRODUCT OVERVIEW

The 30AC series is a switching AC-DC power supply available in single, dual and triple outputs. They offer excellent line and load regulation and is continuously protected against short circuits. The highly reliable module is capable of up to 30W power in a wide ambient temperature range -25°C to +70°C. These modules are the perfect design choice for your most stringent industrial applications.

The case has a low profile height, 0.500", and threaded inserts to mount securely for high vibration and shock applications.



FEATURES

- Up to 30W output power
- Single, dual and triple outputs
- Low profile size - 5" x 3.2" x 0.5"
- 1200V input/output isolation
- Through hole mounting
- Continuous short-circuit protection
- Two input voltage ranges
- Fixed operating frequency
- No external components required

Contact Pico for part number of available options:

- Expanded operating temp: -55°C to +85°C
- Select screening per MIL-STD-883:
 - Stabilization Bake
 - Temperature Cycle
 - Burn-In
- Special Input Voltage, Output Voltage, or Output Power
- Low Isolation Capacitance

H	30AC	5	T	12
INPUT VOLTAGE RANGE	SERIES NAME	MAIN OUTPUT VOLTAGE	NUMBER OF OUTPUTS	TRIPLE OUTPUT AUXILIARY
BLANK = 90 - 130VAC H = 170 - 240 VAC	30AC	5 = 5V 12 = 12V 15 = 15V 24 = 24V 28 = 28V	S = SINGLE D = DUAL T = TRIPLE	5 = ±5V 12 = ±12V 15 = ±15V

MODEL LIST**SINGLE OUTPUT**

Pico Part Number		Output Voltage [VDC]	Output Current		Output Power [W]	Load Regulation 10-100% ⁽¹⁾ [%] max	Output Voltage Tolerance ⁽²⁾ [±%]	Efficiency ⁽²⁾ [%] typ.
90-130 VAC Input	170-240 VAC Input		Min. [A]	Max. [A]				
30AC5S	H30AC5S	5	500	5000	25	0.5	0.5	75
30AC12S	H30AC12S	12	250	2500	30			81
30AC15S	H30AC15S	15	200	2000	30			82
30AC24S	H30AC24S	24	125	1250	30			83
30AC28S	H30AC28S	28	107	1070	30			83

Note 1: Maintain minimum 10% of rated load to prevent a voltage surge.

Note 2: Tested at nominal input voltage and full output load.

DUAL OUTPUT

Pico Part Number		Output Voltage [±VDC]	Output Current Per Output		Output Power Per Output [±W]	Load Regulation 10-100% ⁽¹⁾ [%] max	Output Voltage Tolerance ⁽²⁾ [±%]	Efficiency ⁽²⁾ [%] typ.
90-130 VAC Input	170-240 VAC Input		Min. [±A]	Max. [±A]				
30AC5D	H30AC5D	5	250	2500	12.5	0.5	0.5	76
30AC12D	H30AC12D	12	125	1250	15			78
30AC15D	H30AC15D	15	100	1000	15			80

Note 1: Maintain minimum 10% of rated load to prevent a voltage surge.

Note 2: Tested at nominal input voltage and full output load.

Note 3: Dual output loads must be balanced.

TRIPLE OUTPUT

Pico Part Number		Output Voltage [VDC]	MAIN / AUXILIARY			Load Regulation 25-100% ⁽¹⁾ [%] max	Output Voltage Tolerance ⁽²⁾ [±%]	Efficiency ⁽²⁾ [%] typ.
90-130 VAC Input	170-240 VAC Input		Output Current		Output Power			
			Min. [mA]	Max. [mA]	[W]			
30AC5T12	H30AC5T12	5 / ±12	400 / ±20.8	4000 / ±208	20 / ±2.5	0.5 / 5	0.5 / 5	78
30AC5T15	H30AC5T15	5 / ±15	400 / ±16.6	4000 / ±166	20 / ±2.5			78
30AC12T5	H30AC12T5	12 / ±5	208 / ±50	2080 / ±500	25 / ±2.5			80
30AC15T5	H30AC15T5	15 / ±5	166 / ±50	1660 / ±500	25 / ±2.5			80

Note 1: Maintain minimum 10% of rated load to prevent a voltage surge.

Note 2: Tested at nominal input voltage and full output load.

Note 4: Auxiliary outputs must be balanced.

SPECIFICATIONS (V_{IN} , Full Load, $T_A = +25^\circ\text{C}$, 1 hour warm up unless otherwise specified)**INPUT**

Parameter	Condition	Min.	Typ.	Max.	Units
Input Voltage Range	30AC models	90	115	130	VAC
	H30AC models	170	220	240	
Input Frequency		47	60	440	Hz
Input Fuse Recommendation	30AC models with external 5 Ω inrush thermistor	2A, Rated Voltage \geq Input Voltage			
	H30AC models with external 10 Ω inrush thermistor	1A, Rated Voltage \geq Input Voltage			
Input Thermistor Recommendation	30AC models	-	5	-	Ω
	H30AC models	-	10	-	

OUTPUT

Parameter	Condition	Min.	Typ.	Max.	Units
Line Regulation		-	-	0.2	$\pm\%$
Output Ripple	1MHz bandwidth	-	-	50	mVp-p

ENVIRONMENTAL

Parameter	Condition	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient without derating	-25	-	+70	$^\circ\text{C}$
Storage Temperature Range	Ambient	-55	-	+125	$^\circ\text{C}$
Temperature Coefficient		-	0.02	-	$\%/^\circ\text{C}$
Cooling	Free Air Convection				

GENERAL

Parameter	Condition	Min.	Typ.	Max.	Units
Operating Frequency		25	-	35	kHz
Isolation Voltage	Input to output	1200	-	-	V_{RMS}
Size	L x W x H	5 x 3.2 x 0.5 (127 x 81.28 x 12.7)			inches (mm)
Weight	Single output models	-	325	-	grams
	Dual output models	-	330	-	
	Triple output models	-	340	-	
Case	6-Sided Epoxy Insulated Metal				
Potting	Vacuum Impregnated Epoxy				
Box Packaging	8 x 7.5 x 1.5 (203.2 x 190.5 x 38.1) or 12 x 9 x 1.5 (304.8 x 228.6 x 38.1)				inches (mm)

PROTECTIONS & FEATURES

Parameter	Condition	Min.	Typ.	Max.	Units
Short circuit	Continuous, auto-recovery				

SPECIFICATIONS (V_{IN} , Full Load, $T_A = +25^{\circ}\text{C}$, 1 hour warm up unless otherwise specified)

DESIGNED TO MEET


Test	Referenced Standard	Description
Vibration	MIL-STD-202	Method 204, Vibration, High Frequency, Condition D
Shock	MIL-STD-202	Method 213, Shock (Specified Pulse), Condition I
Humidity	MIL-STD-202	Method 106, Moisture Resistance
Altitude	MIL-STD-202	Method 105, Barometric Pressure (Reduced), Condition D

OPTIONS AVAILABLE - CONTACT PICO FOR PART NUMBER

Parameter	Referenced Standard	Description
Stabilization Bake	MIL-STD-883	Referenced Method 1008 Non-operating maximum storage temperature for 24 hours
Temperature Cycle	MIL-STD-883	Referenced Method 1010 Non-operating at temperature extremes, 15 mins/temp, 10 cycles
Burn-In	MIL-STD-883	Referenced Method 1015 Max operating temperature for 160 hours
Expanded Operating Temperature Range		-55°C to +85°C

TYPICAL CONNECTION CIRCUIT

SINGLE OUTPUT

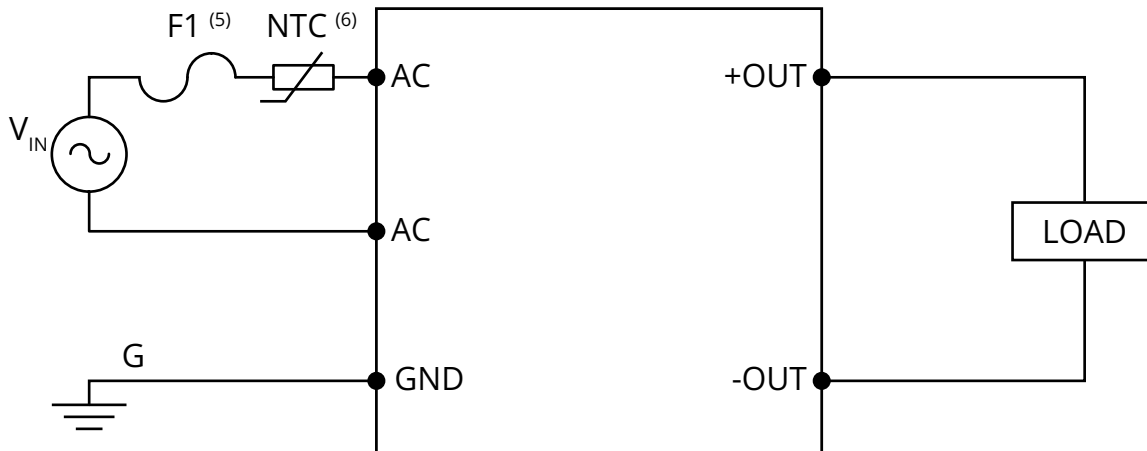


Note 5: For 30AC models, a 2A fuse is required on the input. For H30AC models, a 1A fuse is required on the input.


Note 6: For 30AC models, a 5Ω inrush thermistor is required on the input. For H30AC models, a 10Ω inrush thermistor is required on the input.

TYPICAL CONNECTION CIRCUIT

DUAL OUTPUT

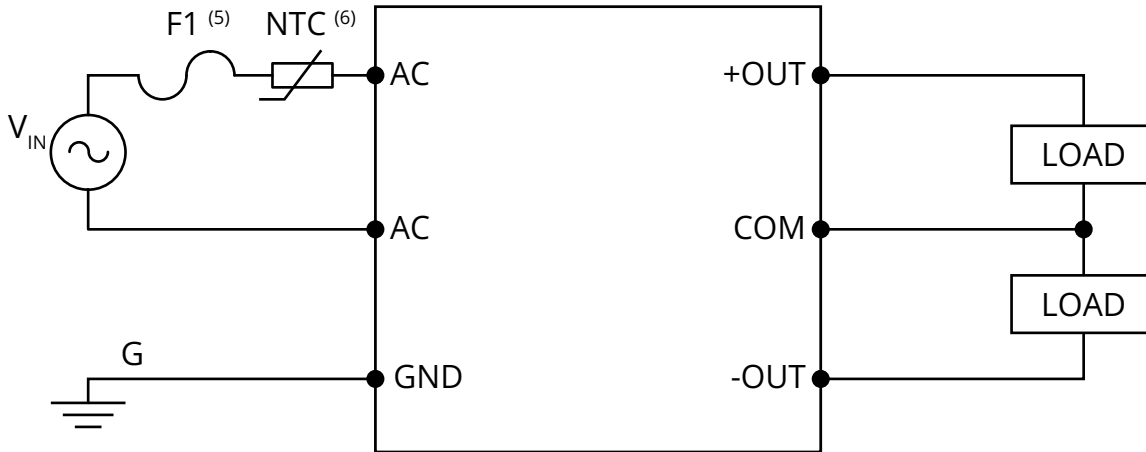

TRIPLE OUTPUT

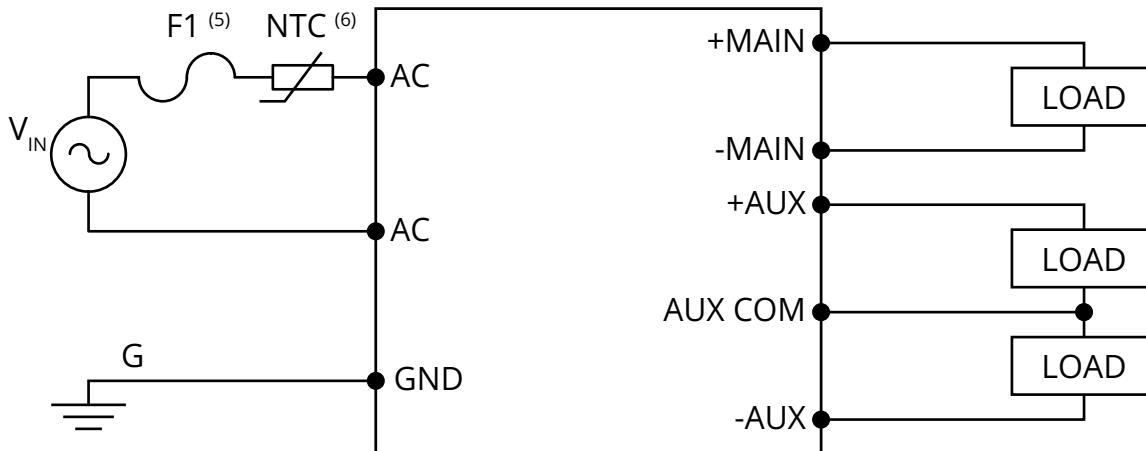

Note 3: Dual output loads must be balanced.


Note 4: Auxiliary outputs must be balanced.

Note 5: For 30AC models, a 1.5A fuse is required on the input. For H30AC models, a 1A fuse is required on the input.


Note 6: For 30AC models, a 5Ω inrush thermistor is required on the input. For H30AC models, a 10Ω inrush thermistor is required on the input.

MECHANICAL DRAWINGS

SINGLE OUTPUTS

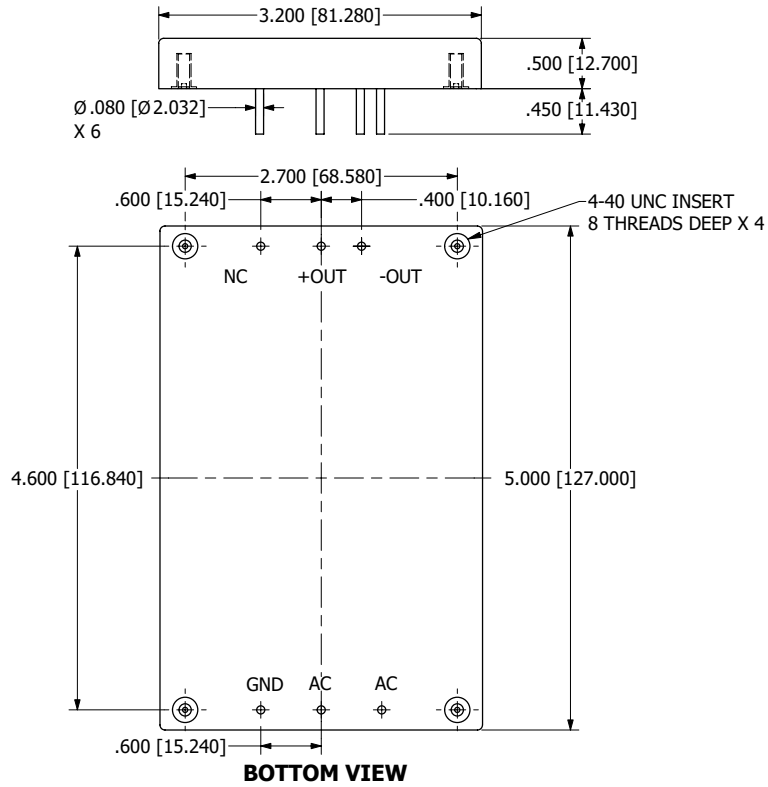


DUAL OUTPUTS

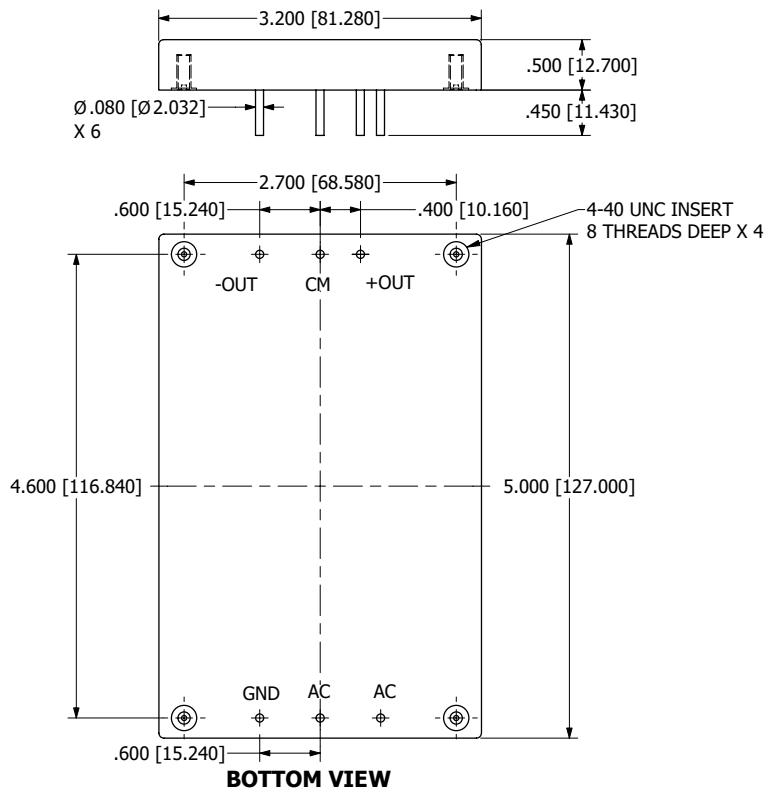


NOTES

- a. ALL DIMENSIONS ARE IN INCHES, [] = MM
- b. THE RECOMMENDED TORQUE FOR MOUNTING SCREWS IS 3-5 IN-LBS.




MECHANICAL DRAWINGS

TRIPLE OUTPUTS


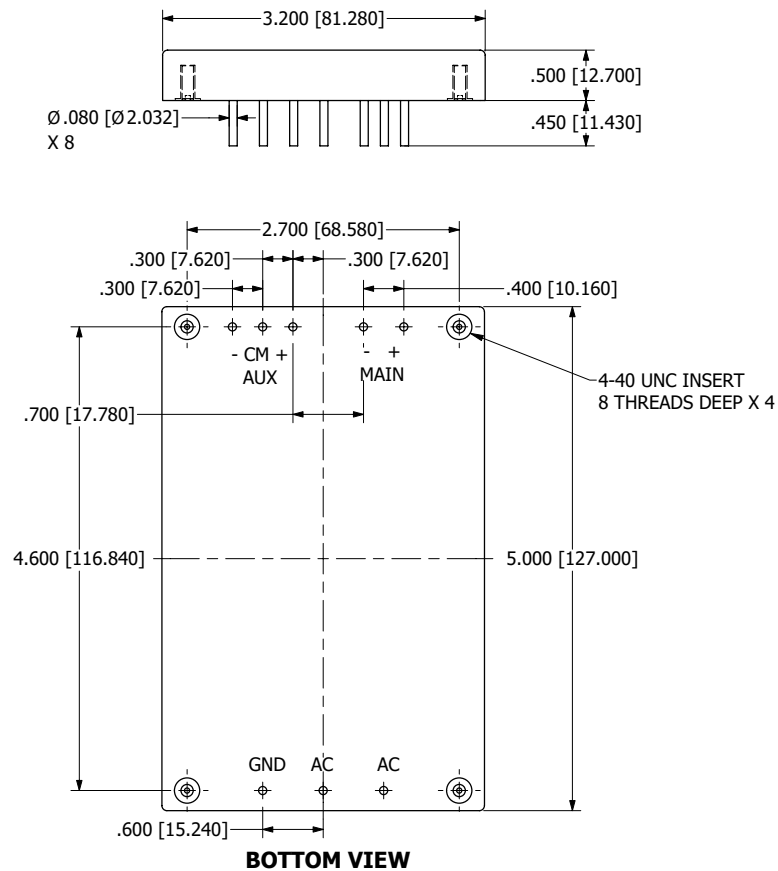


NOTES

- a. ALL DIMENSIONS ARE IN INCHES, [] = MM
- b. THE RECOMMENDED TORQUE FOR MOUNTING SCREWS IS 3-5 IN-LBS.



BOX PACKAGING - BULK

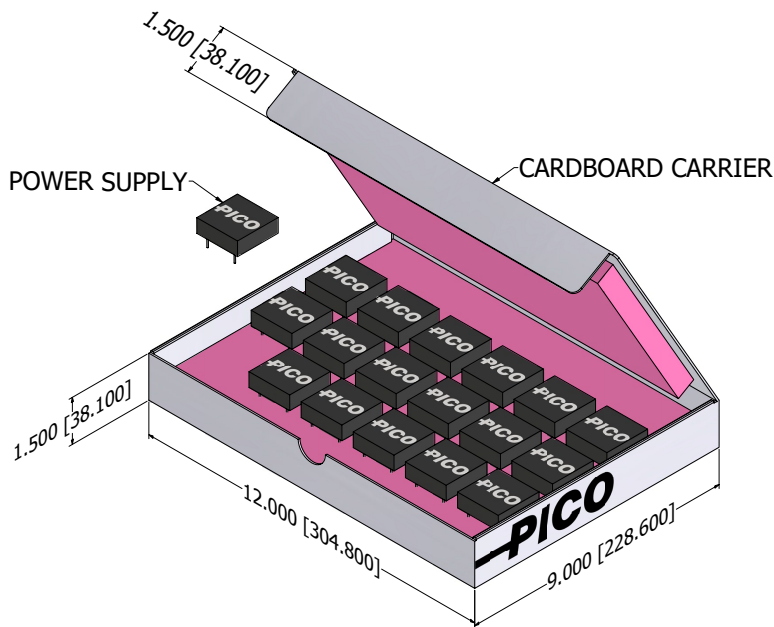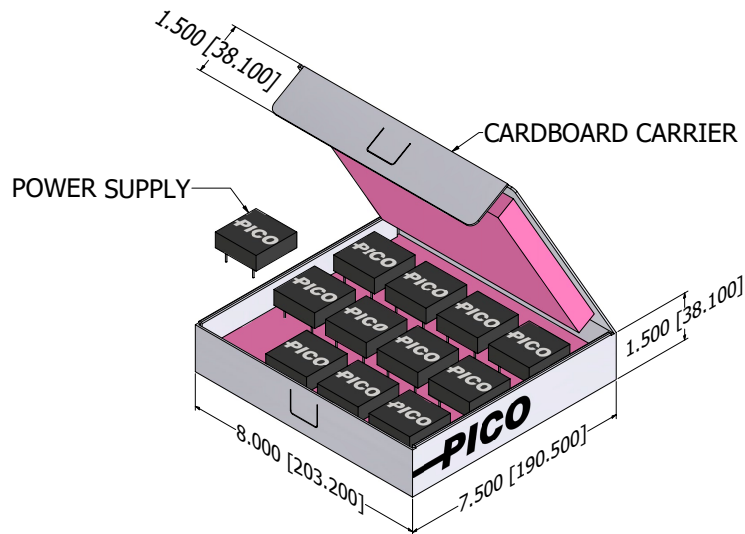

Pico warrants each product manufactured by us and sold by us or an authorized representative, to be free from defects in material and workmanship. If properly used, it will perform within its applicable specifications for a period of one year after original shipment. Pico's obligation under this guarantee is limited to repairing or replacing our product to the original purchaser. This warranty is in lieu of all other warranties, express or implied and constitutes fulfillment of our obligations to the purchaser. We do not guarantee that the products can be used for a particular purpose other than those solely covered by the product's specifications. Pico must be notified if the product must meet particular certifications and/or standards. We assume no liability, in any event, for consequential damages, for anticipated or lost profits, incidental damages or loss of time or other losses incurred by the purchaser or any third party in connection with products covered by this warranty or otherwise. The purchaser will indemnify and hold Pico harmless for any damages, losses, costs, etc. from usage not within the product's specifications. Pico must be consulted before usage of its products in a nuclear, radioactive or space environment.

We reserve the right to discontinue products without notice, We reserve the right to make modifications to any existing catalog products without notice, at any time, without the obligation to modify units previously sold.